



Row Mount Installation

Row Mount

1. Take out the light fixture and accessories from the package.

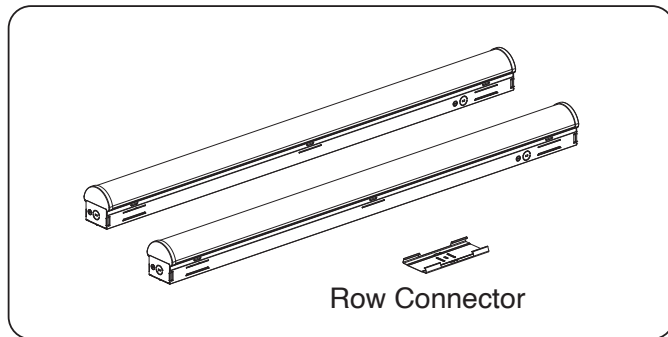


2. Install the Row connector to connect the fixture.

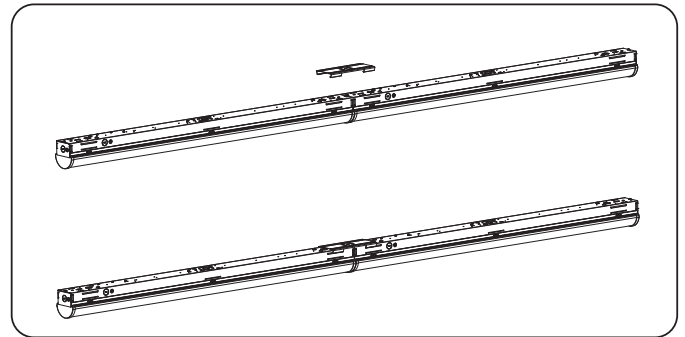

continued on back

Field-Adjustable Wattage & CCT

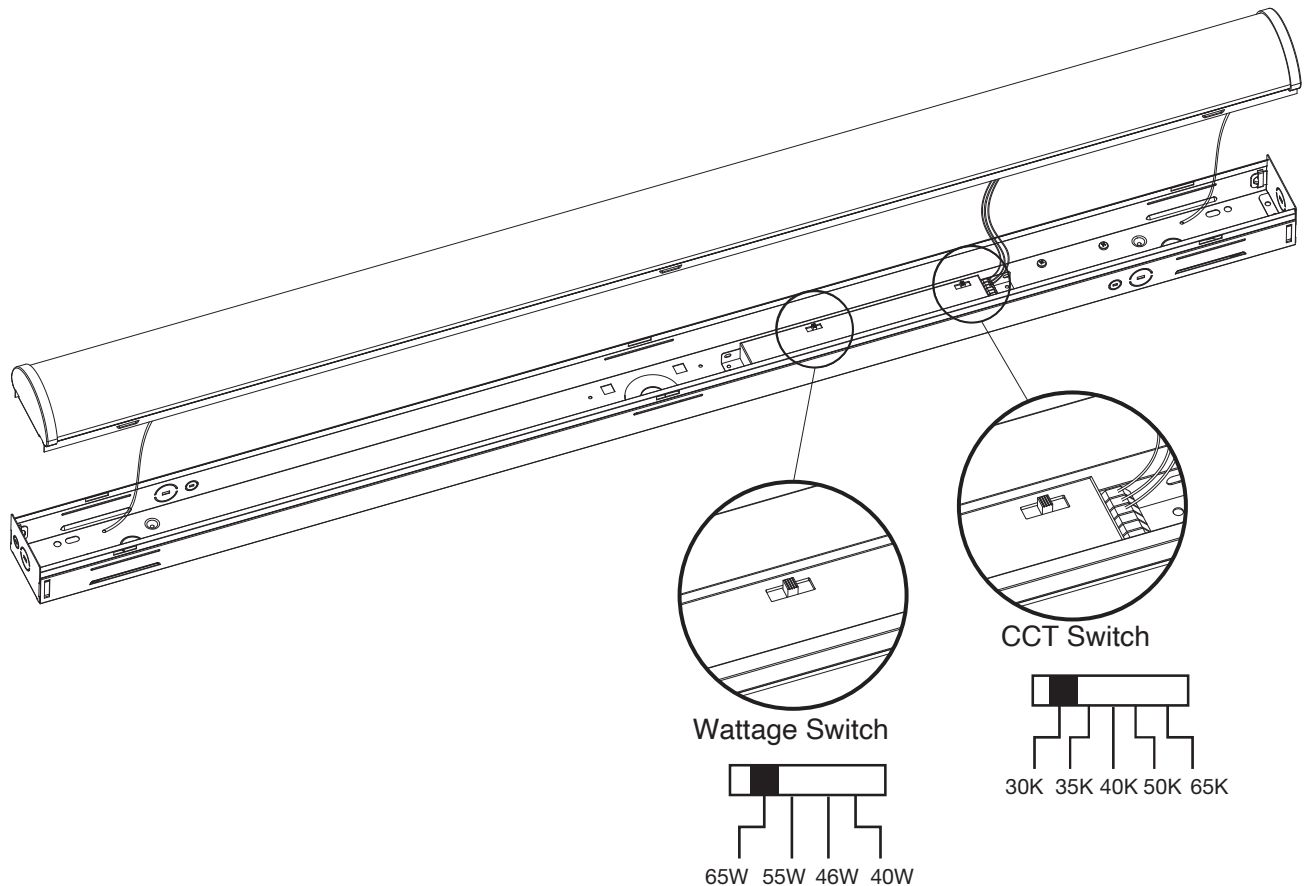


The end users may adjust the color temperature and lumen output respectively by the two DIP switches. CCT switch is accommodated with 5 CCT options (3000K, 3500K, 4000K, 5000K, 6500K) and Power switch is accommodated with 4 Power options. The switches can perform the desired color temperature and lumen Z output combination.

Select a wattage and color temperature by sliding the switch left or right to the desired setting.


Notice: Always turn off the power supply from main circuit breaker first!

Chain Suspension Mount


1. Take out the light fixture and accessories from the package.

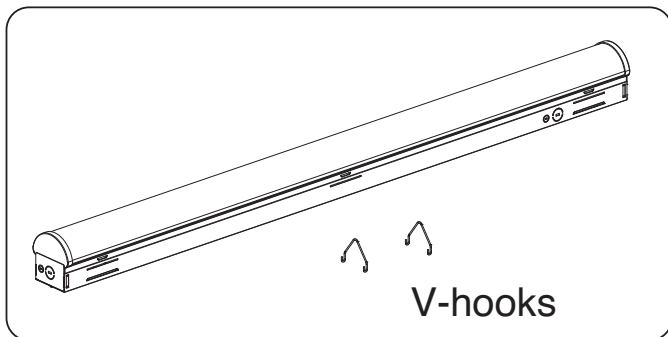


2. Hang the fixtures with V-hooks and chains.

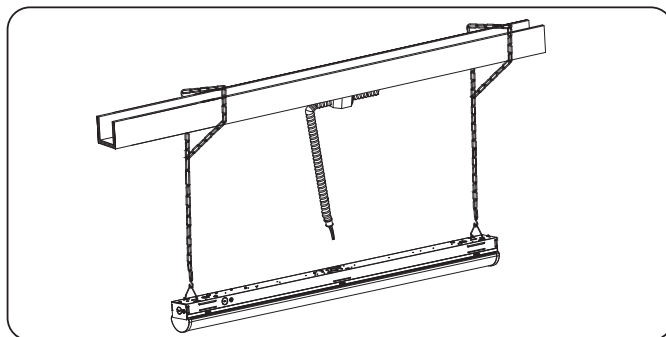


3. Fix the Pipe to the access hole. Remove the lens and connect the wiring*.

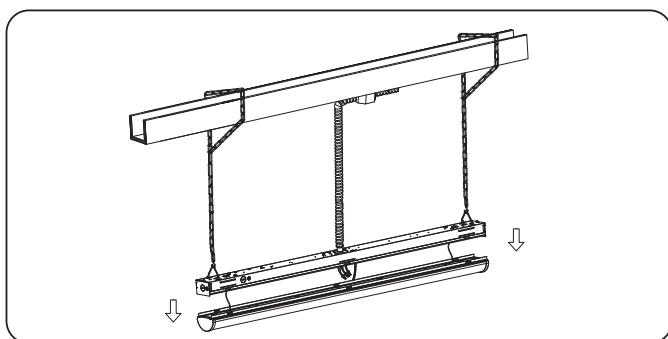

4. Reattach the lens to the housing to complete the installation.

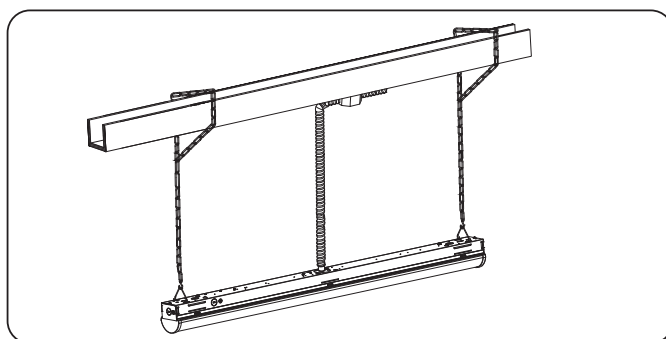

Cable Suspension Mount

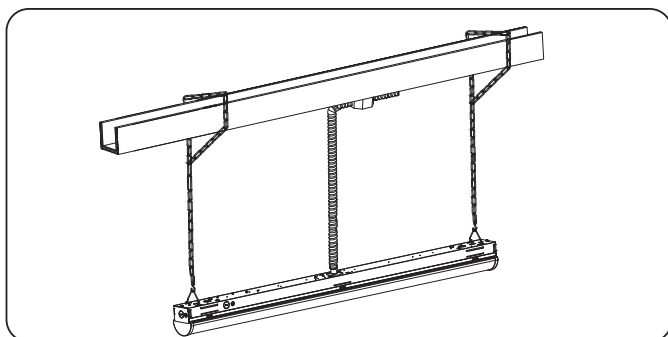


*NOTE: Must be connected to dimming low voltage wire if needed.

continued on back


Notice: Always turn off the power supply from main circuit breaker first!

Surface Mount


1. Take out the light fixture and accessories from the package.

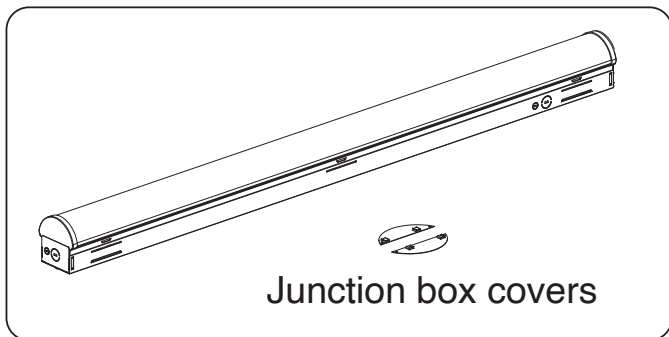


2. Attach the 2 junction box covers onto the back of the fixture.

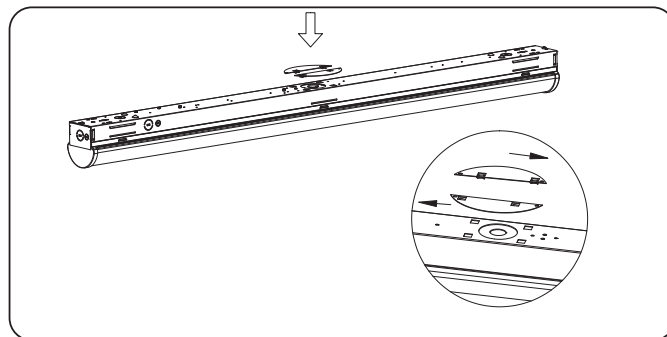


3. Remove the lens by pressing the snap lock on the fixture body.

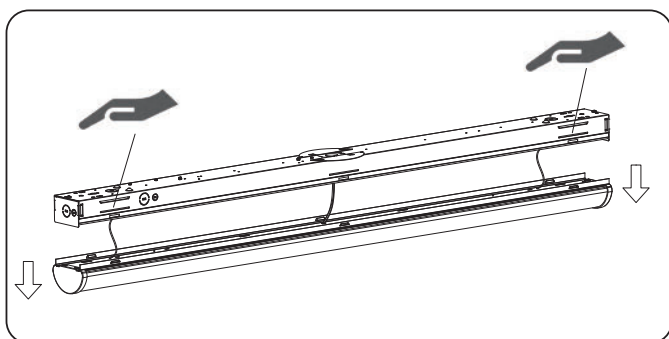


4. Pull AC wires and dimming wires through the access hole. Attach the fixture to mount surface with anchors and screws (by others).

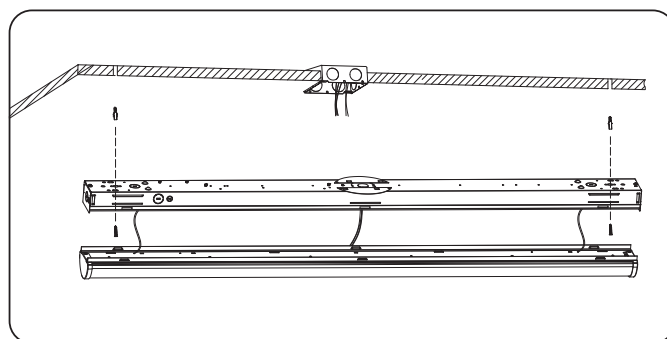

5. Use appropriate UL approved wire connectors as required by code to make wiring with main power and dimming wires*.

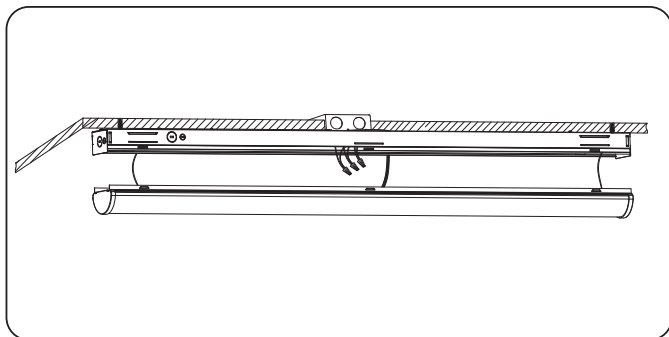

6. Reconnect the lens to the fixture body. The installation is complete.

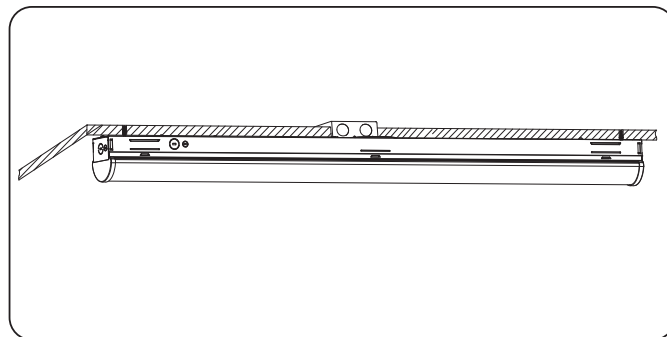

*NOTE: Must be connected to dimming low voltage wire if needed.

continued on back

⚠ WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

⚠ WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

⚠ CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handing fixture.

NOTICE: Green ground screw provided in proper location. Do not relocate.


NOTICE: Minimum 90°C supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp locations.

NOTICE: SUITABLE FOR OPERATION IN AMBIENT NOT EXCEEDING 50°C.

GENERAL WIRING DIAGRAM

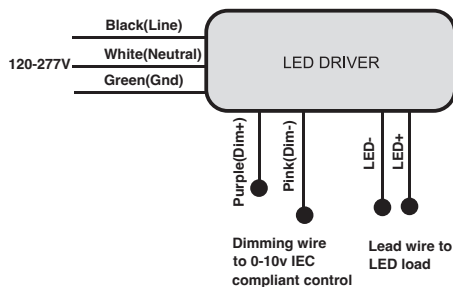

continued on back