



Features

- Featuring an enclosure ideal for wet locations, resistant to corrosive atmospheres, non-hazardous dust environments, water spray or splashing water
- ABS, corrosion-resistant UV stabilized enclosure
- Dual 120 or 277 VAC input, field selectable
- Automatic brownout feature
- Solid-state charging circuit
- Solid-state, line-latched low voltage disconnect provides 100% load disconnect protection to guard against battery deep discharge
- Short circuit and overload protection on DC output circuit
- Sealed momentary test switch
- Sealed AC ready light
- Wet location 0°C to 40°C
- UL listed for wet location
- ETL listed
- NEMA 4 Rated

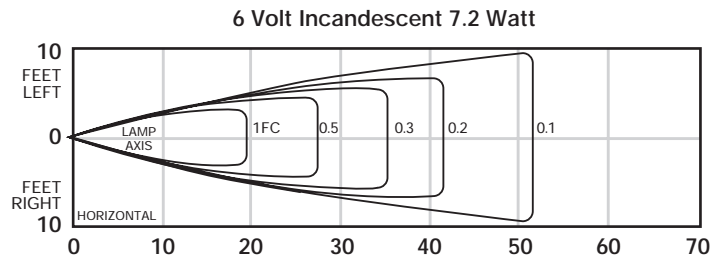

Dimensions

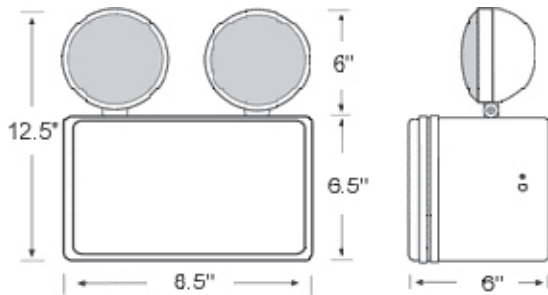

Ordering Information

12 Volt Emergency Lighting Units

Catalog Model #	Description	LED Color	Voltage Input	Lamp Type	Emergency Operation (minutes)
23503	Wet Location Emergency Unit with Two 7.2W 6V Heads, 120/277V	N/A	120/277	2 X 7.2W 6V	90

Accessories

Item #	Description
20739	Replacement Battery Lead Acid 6V 10Ah
927LAMP	Replacement Lamp Halogen 6V 1.20A T5 Wedge

