1'x1' Flat Panel Installation Instructions

HB11UZDSW1CCT

IMPORTANT: Install by Qualified Electrician. Please read instructions before proceeding with installation. Keep these instructions for future reference.

⚠ WARNING

RISK OF ELECTRIC SHOCK

- Turn off power prior to inspection, installation or removal of fixture.
- Ensure electrical enclosure is properly grounded in accordance with National Electrical Code (NEC).

RISK OF FIRE

- Product must be installed in accordance with NEC and/or applicable local codes by a qualified licensed electrician.
- Wiring connections should be made with UL approved wire connectors.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

ATTENTION


- Use care when handling the luminaire. Do not drop, press, or bend the light panel to avoid damage during installation.
- Work gloves are recommended when handling the LED luminaire to protect hands and prevent the transfer of dirt and oil to the luminaire.
- Prior to installation, carefully unpack and properly inspect luminaire for any damage or loose connections that may have occurred during shipping.

continued on back

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com
©TCP NOV 2026/RS10102

LUMINAIRE INSTALLATION

Junction Box Mounting

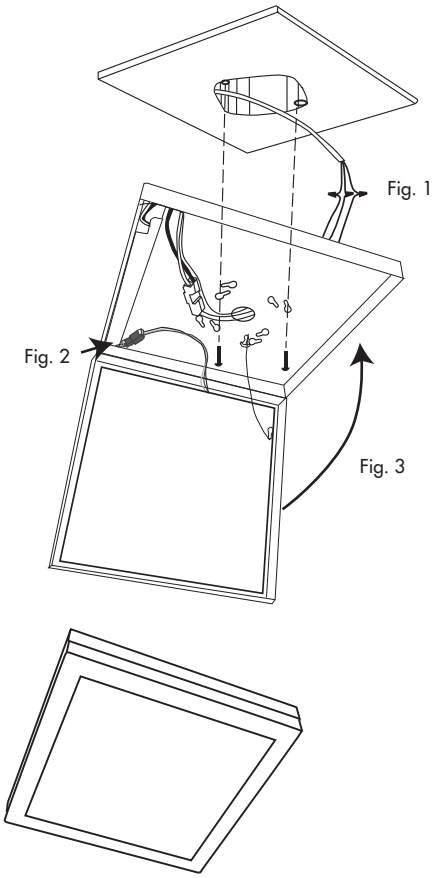

Step 1: To avoid risk of electric shock, make sure to turn off main power switch prior to installation or maintenance.

Step 2: **Separate Fixture Components.** Simultaneously press the pressure clip buttons on both sides of the fixture to separate the top half from the bottom half of the fixture. Release the safety cable from the top and bottom halves.

Step 3: Drive the screws into the junction box, with 2/3 inside and 1/3 outside.

Step 4: Feed the White, Black, and Green/Yellow wires through the large central opening of the fixture top.

Step 5: ELECTRICAL CONNECTIONS

Connect white wire(s) from the fixture to the white (neutral) wire of the supply circuit, and screw on a wire connector.

Connect the black wire(s) from the fixture to the black (live) wire of the supply circuit, and screw on a wire connector.

Connect the green wire(s) from the fixture to the ground wire, and screw on a wire connector. (Figure 1).

Step 6: Tuck all the wires and connectors into the junction box. Align the mounting hole on the fixture to the screws and secure luminaire to the junction box. (Figure 1). **Reconnect the safety cable to the top and bottom halves.**


Step 7: Connect the plug from the top half and bottom half of the fixture. (Figure 2) Tuck the wiring and safety tether inside the bottom half of the fixture and snap the top and bottom halves together. (Figure 3)

Step 8: Turn on power and turn on light switch to activate luminaire.

SAVE THESE INSTRUCTIONS


TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com
©TCP NOV 2026/RS10102

WATTAGE & CCT SELECTION SWITCHES

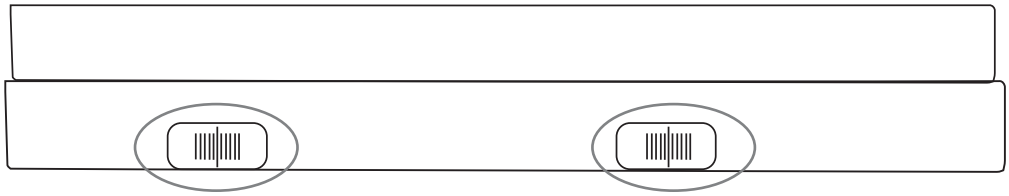

This model features wattage and CCT selectability. Use the switches on the side of fixture to select the options.

ELECTRICAL CONNECTION

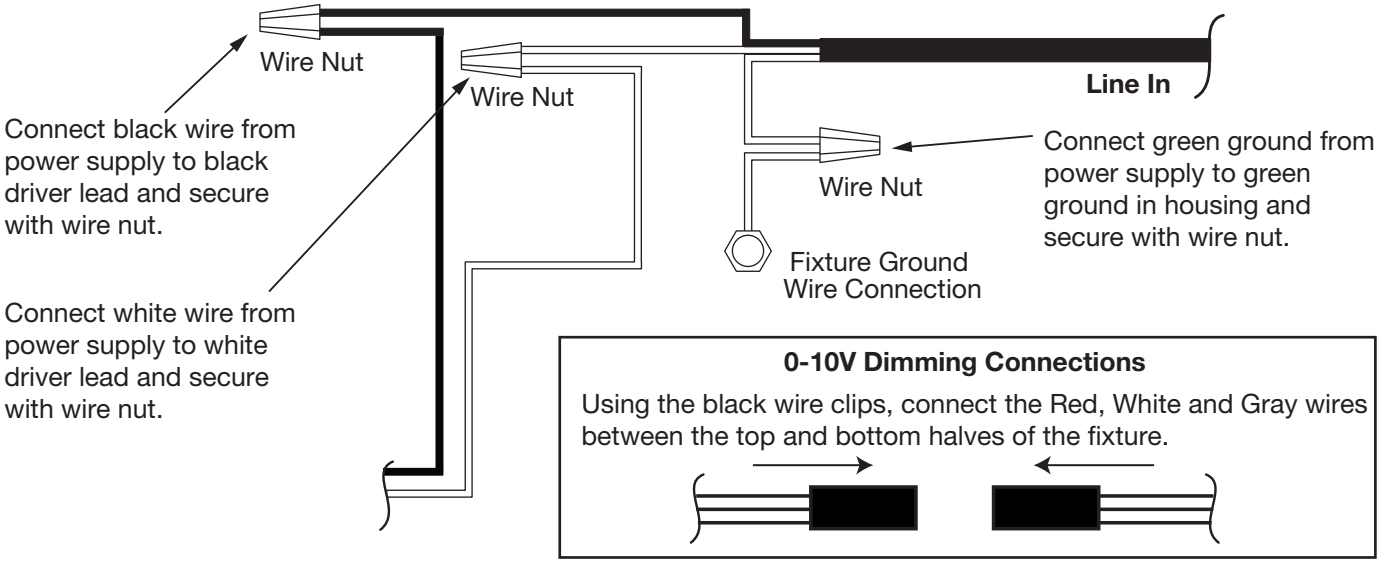

These instructions are not intended to cover all details or variations in your equipment or your particular requirements for installation, operation or maintenance. Should further information on this product be needed that is not covered by these general installation instructions, please contact the TCP Customer Service Department at phone number 800-324-1496 for further assistance.

SAVE THESE INSTRUCTIONS

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com
©TCP NOV 2026/RS10102