



558 Series Outdoor Wall Fixture Specifications


2 Piece SpringLamp®

- 4 pin, NPF Compact Fluorescent, 10,000 Hours lamp life

Item #	Watts	Incandescent Wattage Comparison	Description	Initial Lumens	Input Line Current	Height (Inches)	Width (Inches)	Replacement Lamps
55815BK	15	60	Wall Fixture, Black, White Globe	930	.24A	10.0	7.4	35015
55815WH	15	60	Wall Fixture, White, White Globe	930	.24A	10.0	7.4	35015
55815BPC	15	60	Wall Fixture, Black, Photocell, White Globe	930	.24A	10.0	7.4	35015
55815WPC	15	60	Wall Fixture, White, Photocell, White Globe	930	.24A	10.0	7.4	35015
55815BPZ	15	60	Wall Fixture, Black, Prismatic Globe	930	.24A	10.0	7.4	35015
55815WPZ	15	60	Wall Fixture, White, Prismatic Globe	930	.24A	10.0	7.4	35015
55815BPCPZ	15	60	Wall Fixture, Black, Photocell, Prismatic Globe	930	.24A	10.0	7.4	35015
55815WPCPZ	15	60	Wall Fixture, White, Photocell, Prismatic Globe	930	.24A	10.0	7.4	35015
55818BK	18	75	Wall Fixture, Black, White Globe	1100	.29A	10.0	7.4	35018
55818WH	18	75	Wall Fixture, White, White Globe	1100	.29A	10.0	7.4	35018
55818BPC	18	75	Wall Fixture, Black, Photocell, White Globe	1100	.29A	10.0	7.4	35018
55818WPC	18	75	Wall Fixture, White, Photocell, White Globe	1100	.29A	10.0	7.4	35018
55818BPZ	18	75	Wall Fixture, Black, Prismatic Globe	1100	.29A	10.0	7.4	35018
55818WPZ	18	75	Wall Fixture, White, Prismatic Globe	1100	.29A	10.0	7.4	35018
55818BPCPZ	18	75	Wall Fixture, Black, Photocell, Prismatic Globe	1100	.29A	10.0	7.4	35018
55818WPCPZ	18	75	Wall Fixture, White, Photocell, Prismatic Globe	1100	.29A	10.0	7.4	35018

Height - 10.0"
Width - 7.4"
Depth - 6"

Globe Diameter - 4.4"

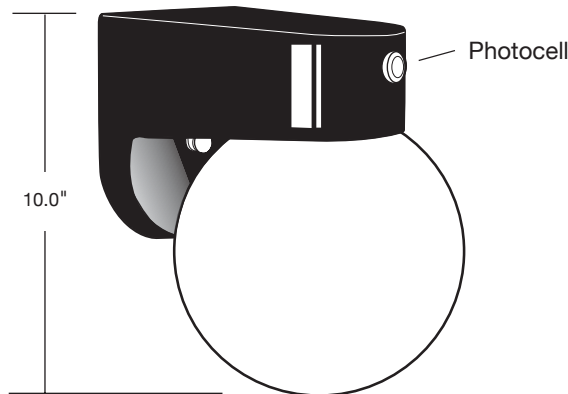

2 Piece SpringLamp



Specifications (at full brightness)

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Lamp Life (rated) -----	10,000 Hours
Ballast Life (rated) -----	50,000 Hours
Color Temperature -----	2700°K
Color Rendering Index -----	84
Minimum Starting Temperature -----	-20 ° F
Maximum Operating Temperature -----	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency -----	45 KHZ
Lamp Current Crest Factor -----	< 1.60
Maximum Open Circuit Voltage -----	600V
Power Factor -----	>.50
Total Harmonic Distortion -----	< 150%
Dimming Range -----	N/A

Applications:

- Use outdoors, mounts flush to any wall
Perfect for: porches, door ways and garages

Features and Benefits

- UL approved for wet locations
- Long life, 10,000 hour average rated lamp life
50,000 hour average rated ballast life
- Lasts 7 years, based on 3 hours use per day
- Lasts 10-13 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- 2700°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance



ISO 9002
CERTIFIED

2 YEAR FIXTURE
WARRANTY

1 YEAR LAMP
WARRANTY

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcp.com

©TCP, Inc. 2008/02343