



Wet Location Emergency Specification

Wet Location Emergency Unit

120 or 277 Voltage, Wet Location

Features and Benefits:

- Featuring an enclosure ideal for wet locations, resistant to corrosive atmospheres, non-hazardous dust environments, water spray or splashing water
- ABS, corrosion-resistant UV stabilized enclosure
- Dual 120 or 277 VAC input, field selectable
- Automatic brownout feature
- Solid-state charging circuit
- Solid-state, line-latched low voltage disconnect provides 100% load disconnect protection to guard against battery deep discharge
- Short circuit and overload protection on DC output circuit
- Sealed momentary test switch
- Sealed AC ready light
- Wet location 0°C to 40°C
- UL listed for wet location
- ETL listed



Catalog Number

Notes

Type



Dimensions:

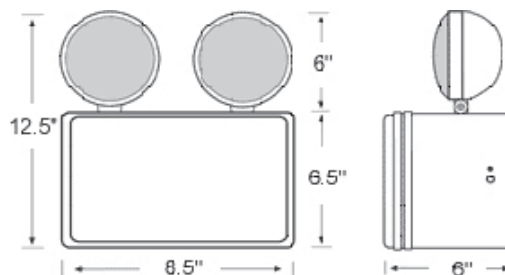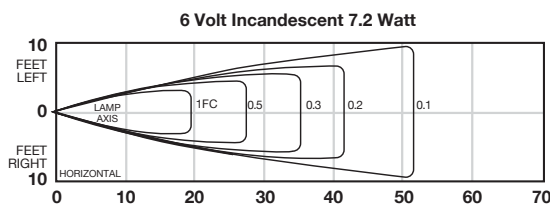

Warranties & Compliances:

Unit

5 YEAR WARRANTY

Sealed Lead Acid Battery

1 YEAR WARRANTY



Item #	Description	Voltage Input	Lamp Type	Emergency Operation (minutes)
--------	-------------	---------------	-----------	-------------------------------

Ordering Information:

23503	Wet Location Emergency Unit with Two 7.2W 6V Heads, 120/277V	120/277	2 X 7.2W 6V	90
-------	--	---------	-------------	----

Accessories:

20739	Replacement Battery Lead Acid 6V 10Ah
927LAMP	Replacement Lamp Halogen 6V 1.20A T5 Wedge

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 1-800-324-1496 | F: 330-995-6188 | tcp.com

©TCP, Inc. NOV 2009/41828

TCP is proud to have been awarded ENERGY STAR® Partner of the Year 2009.

