



LiberaT8™
LED



BALLAST BYPASS

LED LiberaT8™ Tubes

Limitless Options
for the following applications:

LED compatible replacement for linear fixtures that
operate independently of ballasts.

- Offices
- Restaurants
- Retail Stores
- Lobbies
- Schools
- Hospitals



5 YEAR
WARRANTY

CONFORMS TO NSF STD. 2

we know light.™



LED LiberaT8™ Tubes

Features and Benefits

>40% energy savings
Long life: 50,000
Bypass Application: 120-277 line voltage
Instant on/off
Non-flickering
Double ended construction for safety
Shunted or non-shunted lampholders
Highly durable SHATTERPROOF plastic (4, 3 and 2 foot tubes)
UL rated for enclosed fixtures
No energy losses due to fluorescent ballast

Specifications

Base Types: G13, R17d, Fa8
Construction: Double ended
Wattage: 9w, 12w, 13.5w, 43w
Minimum starting temperature range: -22F / -30C
Safety: UL Classified
Environment: Damp/dry locations
Enclosed: Suitable for enclosed luminaires
Rated life: L70 50,000+ hours
Beam Angle: 4, 3 & 2 foot 190° / 8 foot 230°
Field Angle: 4, 3 & 2 foot 300° / 8 foot 330°

Listing

UL Classified
Recognized Component ETL

Warranty

Five years against defects in manufacturing

SHATTERPROOF PLASTIC

4 foot



3 foot



2 foot



G13 base

GLASS

8 foot
R17d base



8 foot
Fa8 base



CONFORMS TO NSF STD. 2

5 YEAR
WARRANTY







To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.



LED LiberaT8™ Tubes

LED Ballast Bypass T8 Tubes – 4', 3' and 2'

Item#	Description	DLC QPL	LED Wattage	Voltage	Fluorescent Equivalency	Lumens	LPW	Base	CCT	CRI	Master Pack
LED 13.5 WATT T8 TUBE – 4 FOOT G13 BASE											
L13T8BY5030K	LED 13.5W Ballast Bypass 4' T8 30K	*	13.5	120-277V AC	32W	1800	133.3	G13	3000K	80	25
L13T8BY5035K	LED 13.5W Ballast Bypass 4' T8 35K	*	13.5	120-277V AC	32W	1800	133.3	G13	3500K	80	25
L13T8BY5041K	LED 13.5W Ballast Bypass 4' T8 41K	*	13.5	120-277V AC	32W	1900	140.7	G13	4100K	80	25
L13T8BY5050K	LED 13.5W Ballast Bypass 4' T8 50K	*	13.5	120-277V AC	32W	2000	148.1	G13	5000K	80	25
LED 12 WATT T8 TUBE – 3 FOOT G13 BASE											
L12T8BY5030K	LED 12W Ballast Bypass 3' T8 30K		12	120-277V AC	25W	1200	100.0	G13	3000K	80	25
L12T8BY5035K	LED 12W Ballast Bypass 3' T8 35K		12	120-277V AC	25W	1200	100.0	G13	3500K	80	25
L12T8BY5041K	LED 12W Ballast Bypass 3' T8 41K		12	120-277V AC	25W	1200	100.0	G13	4100K	80	25
L12T8BY5050K	LED 12W Ballast Bypass 3' T8 50K		12	120-277V AC	25W	1200	100.0	G13	5000K	80	25
LED 9 WATT T8 TUBE – 2 FOOT G13 BASE											
L9T8BY5030K	LED 9W Ballast Bypass 2' T8 30K	*	9	120-277V AC	17W	1125	125.0	G13	3000K	80	25
L9T8BY5035K	LED 9W Ballast Bypass 2' T8 35K	*	9	120-277V AC	17W	1125	125.0	G13	3500K	80	25
L9T8BY5041K	LED 9W Ballast Bypass 2' T8 41K	*	9	120-277V AC	17W	1200	133.3	G13	4100K	80	25
L9T8BY5050K	LED 9W Ballast Bypass 2' T8 50K	*	9	120-277V AC	17W	1250	138.8	G13	5000K	80	25

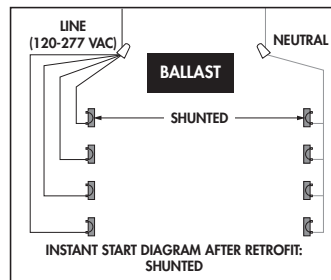


LED Ballast Bypass T8 Tubes – 8'


Item#	Description	DLC QPL	LED Wattage	Voltage	Fluorescent Equivalency	Lumens	LPW	Base	CCT	CRI	Bulk Pack
LED 43 WATT T8 TUBE – 8 FOOT R17D BASE											
LT8R43B230KBP	LED 43W 8' T8 R17d DE BY 30K		43	120-277V AC	75W	5100	118.6	R17d	3000K	80	10
LT8R43B235KBP	LED 43W 8' T8 R17d DE BY 35K		43	120-277V AC	75W	5500	127.9	R17d	3500K	80	10
LT8R43B240KBP	LED 43W 8' T8 R17d DE BY 40K		43	120-277V AC	75W	5500	127.9	R17d	4100K	80	10
LT8R43B250KBP	LED 43W 8' T8 R17d DE BY 50K		43	120-277V AC	75W	5500	127.9	R17d	5000K	80	10
LED 43 WATT T8 TUBE – 8 FOOT FA8 BASE											
LT8F43B230KBP	LED 43W 8' T8 Fa8 DE BY 30K		43	120-277V AC	75W	5100	118.6	Fa8	3000K	80	10
LT8F43B235KBP	LED 43W 8' T8 Fa8 DE BY 35K		43	120-277V AC	75W	5500	127.9	Fa8	3500K	80	10
LT8F43B240KBP	LED 43W 8' T8 Fa8 DE BY 40K		43	120-277V AC	75W	5500	127.9	Fa8	4100K	80	10
LT8F43B250KBP	LED 43W 8' T8 Fa8 DE BY 50K		43	120-277V AC	75W	5500	127.9	Fa8	5000K	80	10

Wiring Instructions – Electronic Ballast

RETROFIT LUMINAIRE WITH 1 LAMP

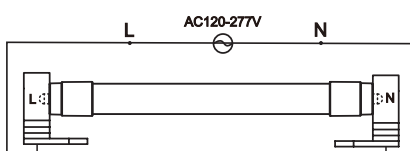


RETROFIT LUMINAIRE WITH 2 LAMPS

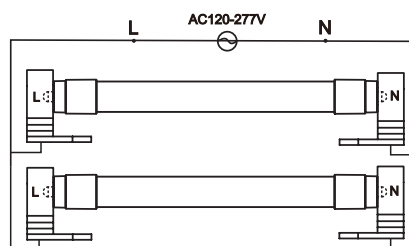

Wiring Instructions – Magnetic Ballast

RETROFIT LUMINAIRE MAGNETIC BALLAST

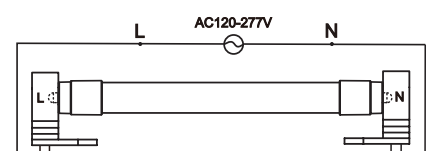

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market — that transforms your surroundings and envelopes you in warmth — lighting that generates beauty with every flip of the switch.



For more information on the quality and care TCP can deliver, call us at 800.324.1496 or visit tcpi.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516