

TCP's LED Barn Light combines the look of a traditional barn light with the benefits of LED. An efficient alternative to HID, these barn lights deliver bright, uniform light while providing energy savings. A long 50,000 hour rated life significantly decreases maintenance labor and material costs over the life of the fixture.

The robust die-cast aluminum housing incorporates an impact-resistant polycarbonate lens. NEMA 3-pin photocontrol comes standard in the box. The Barn Light mounts directly to a wall or horizontal arm up to 3" nominal diameter for easy installation or retrofit of traditional luminaires.

Reasons to choose the LED Barn Light from TCP

- Long 50,000 hour rated life minimizes replacements and labor costs
- Efficiently delivers up to 150 LPW
- Impact-resistant polycarbonate lens

- Die-cast aluminum housing
- Outdoor Wet Location Rated
- Mounts to a wall or horizontal arm up to 3" nominal diameter

Ideal Applications

- Site Lighting
- Security Lighting

- Entrances
- Perimeters

General Area Lighting









LED Barn Light

Applications

This product family can be effectively used in outdoor wall mount or horizontal arm mount locations. Applications include commercial, industrial, and rural exterior lighting: parking lots, cargo doors, high wall areas, and security.

Construction

- Die-cast aluminum housina
- Impact-resistant polycarbonate lens
- Durable, dark bronze powder coat
- Mounts to a wall or horizontal arm up to 3" nominal diameter

Electrical

- Outdoor Wet Location Rated
- Easily access wiring for quick installation
- System rated for long 50,000 hour life
- Efficiently delivers up to 150 LPW

Optics

- Delivers bright, white light and excellent uniformity
- Clear, impact-resistant polycarbonate outer lens





Listings


cETLus Listed RoHS Compliant Outdoor Wet Location Rated DLC 5.1 Premium

Warranty

Five year limited warranty against defects in manufacturing

Optional Accesories

opilional / tococolios				
ITEM NUMBER	DESCRIPTION			
BNLARM90	2 3/8" O.D. 90 DEGREE MOUNTING ARM			
	(FASTENERS FOR WALL MOUNTING NOT INCLUDED)			

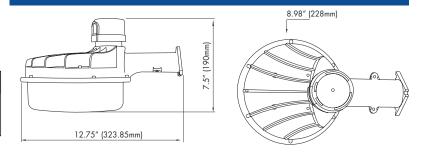

Catalog Ordering Matrix Example: BNLUZDA250KN3BR							
FAMILY	VOLTAGE	DIMMING	LUMEN PACKAGE (Power) ^{1,2}	сст	CONTROLS	COLOR	
BNL = Barn Light	U = 120-277V	ZD = 0-10V	A2 = 6000 Lumens (40W) A3 = 9000 Lumens (60W)	40K - 4000K 50K - 5000K	N3 - NEMA 3 PIN Photocell	BR = Bronze	

Dimensions 1

For the most up-to-date specs and warranty information, please visit www.tcpi.com







¹Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

² Actual wattage may differ by +/- 10%.

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:	Catalog Number:
Date:	Туре:
Model:	Notes:
Project:	TCD.
Rep:	TCP we know light.™