



LED T8 Type AB Tubes

Lamp Ballast and
Line Voltage
Compatible

TCP now offers LED T8 Type AB Tubes. These T8 tubes provide Direct Wire or Plug and Play application and are compatible with many Instant Start Ballasts.

Reasons to choose the LED T8 Type AB Tubes from TCP

- Bypass Application: 120-277 line voltage
- Plug and Play Application: Compatible with many Instant Start Ballasts
- Instant startup
- Double ended construction for safety
- Shunted or non-shunted lampholders
- Highly durable PET Coated glass available

Ideal Applications

- Offices
- Restaurants
- Retail Stores
- Lobbies
- Schools
- Hospitals

Specifications:

Base Types.....G13
ConstructionDouble-ended
Wattage..... 15W
Operating temperature range -20C – 45C
Safety ETL Classified
Target Replacement Lamps 32W/48T8
Environment..... Damp/Dry Locations

Enclosed Suitable for enclosed luminaires
Rated Life..... L70 50,000+ hours
Beam Angle 190°
Field Angle 300°
Listing..... ETL Classified, RoHS Compliant
Warranty Five years against defects in manufacturing



RECOGNIZED
COMPONENT




Intertek
4005203
CONFORMS TO NSF STD. 2

RoHS
COMPLIANT


5 YEAR
WARRANTY
*Based on 12 hours
use per day

Specifications:

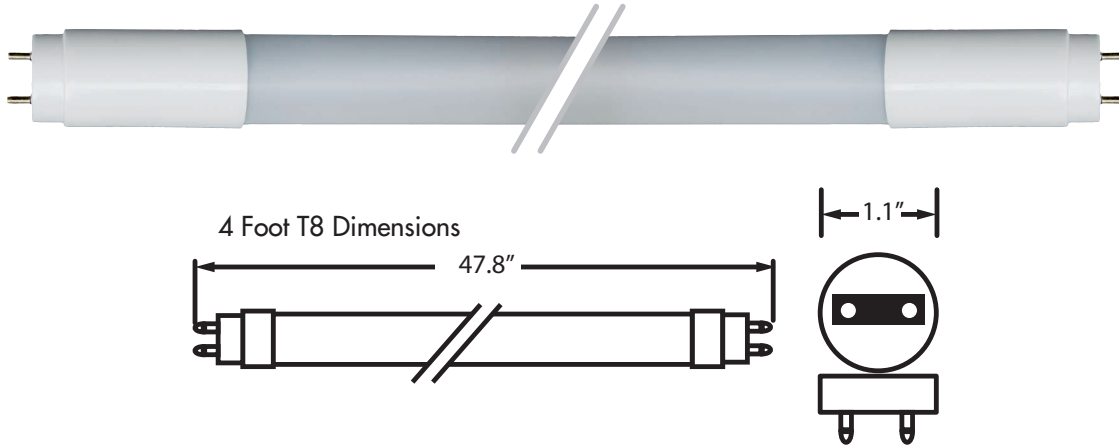


Wiring Diagrams:

Double Ended Wiring

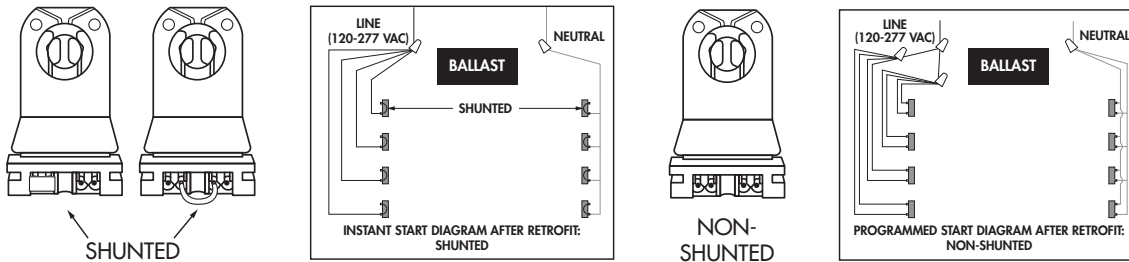

Single Ended Wiring

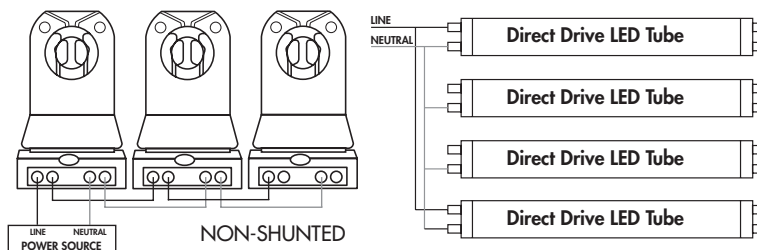

Complete instructions tcp.com / Commercial lighting / Business Resource Center



LED T8 Type AB Tubes

LED Ballast Bypass Double Ended T8 Tubes

Item#	Description	CRI	PF	Color Temp	Line Voltage Watts	Line Voltage Lumens	Line Voltage LPW	NBF System Watts	NBF System Lumens*	NBF System LPW	Base	Warranty Years	Master Pack
LED 12W T8 A + B – 4 FOOT GLASS (DLC# T804003XXE)													
LT815AB30K	LED T8 Type AB DE 30K	80	0.99	3000K	12W	1700	141.7	15W	1700	111.5	G13	5	25
LT815AB35K	LED T8 Type AB DE 35K	80	0.99	3500K	12W	1700	141.7	15W	1700	111.5	G13	5	25
LT815AB41K	LED T8 Type AB DE 41K	80	0.99	4100K	12W	1800	150.0	15W	1800	118.0	G13	5	25
LT815AB50K	LED T8 Type AB DE 50K	80	0.99	5000K	12W	1800	150.0	15W	1800	118.0	G13	5	25
LED 12 WATT T8 TUBE – 4 FOOT PET COATED GLASS NSF RATED • (DLC# T804003AXXE)													
LPT815AB30K	LED T8 Type AB DE 30K	80	0.99	3000K	12	1700	141.7	15	1700	111.5	G13	5	25
LPT815AB35K	LED T8 Type AB DE 35K	80	0.99	3500K	12	1700	141.7	15	1700	111.5	G13	5	25
LPT815AB41K	LED T8 Type AB DE 41K	80	0.99	4100K	12	1800	150.0	15	1800	118.0	G13	5	25
LPT815AB50K	LED T8 Type AB DE 50K	80	0.99	5000K	12	1800	150.0	15	1800	118.0	G13	5	25
LED 15W T8 TUBE - 4 FOOT PET COATED GLASS NSF RATED • (DLC# T804006AXXE)													
LPT818AB41K	LED T8 Type AB DE 41K	80	0.99	4100K	15	2200	146.7	18	2200	122.2	G13	5	25
LPT818AB50K	LED T8 Type AB DE 50K	80	0.99	5000K	15	2200	146.7	18	2200	122.2	G13	5	25

LED T8 Type AB Compatibility List

Brand	Item #	Start Method	Lamp Qty	Ballast Factor	Wiring Method	1 Lamp Fixture		2-3 lamp Fixture	
						120v	277v	120v	277v
Osram Sylvania	QHE 2X32T8/UNV ISN-SC	IS	2	N	0.88	Parallel	✓	✓	✓
	QHE 1X32T8/UNV ISN-SC	IS	1	N	0.88	N/A	✓	✓	✓
	QTP 2X32T8/UNV ISN-SC	IS	2	N	0.88	Parallel	N/A	✓	N/A
	QT 2x32277 IS-SC	IS	2	N	0.88	Parallel	✓	✓	✓
	QHE 2X32T8/UNV ISH HT-SC	IS	2	H	1.2	Parallel	✓	✓	✓
	QTP 3X32T8/UNV ISN-SC	IS	3	N	0.88	Parallel	✓	✓	✓
Philips-Advance	ICN-2P32-SC	IS	2	N	0.89	Parallel	✓	✓	✓
	VEL-2P32-SC	IS	2	N	0.88	Parallel	N/A	✓	N/A
	ICN-3P32-SC	IS	3	N	0.89	Parallel	✓	✓	✓
Universal Lighting	B332IUNVHP-A	IS	3	N	0.88	Parallel	✓	✓	✓
	B232I277RHA-A	IS	2	N	0.88	Parallel	N/A	✓	N/A
General Electric	GE232MAX-G-N	IS	2	N	0.88	Parallel	✓	✓	✓
ESPEN	VE232MVHHPHE	IS	2	H	1.19	Parallel	✓	✓	✓
	VE2P32MVHIPE	IS	2	N	0.89	Parallel	✓	✓	✓

Ballast compatibility tests are performed under a controlled lab environment. Field conditions may vary from this type of environment. Ballasts may differ by age and could have undergone revisions under the same item number affecting compatibility. Compatibility may also extend beyond this list. TCP recommends trying a few ballast-lamp combinations in an on-site test to ensure compatibility and performance before a major installation.

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP MAR 2021/WF199338



CONFORMS TO NSF STD. 2

RoHS COMPLIANT

5 YEAR WARRANTY
*Based on 12 hours use per day

To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/apl.

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcpi.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516