


LED	25,000 Hours average rated life, 12 Volts
------------	---

Applications:


+ Low Voltage Elevator Lighting

Replaces 20 watt 1383 and GBF incandescent lamps.



Features and Benefits

- **Energy Efficient:** 90% less energy than standard incandescent replacements
- **Long life:** 25,000 hours (lasts at least 15 times longer than alternative)
- **More Light:** More overall light output compared to incandescent
- **Very Durable:** Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design. LEDs perform exceptionally well in rough service lighting applications.
- Exceptional ON/OFF cycling capability that is compatible with occupancy control systems
- Very low heat generation in cab as compared to incandescent lamps.
- No need for shatter resistant coatings. Polycarbonate lens is shatter resistant.

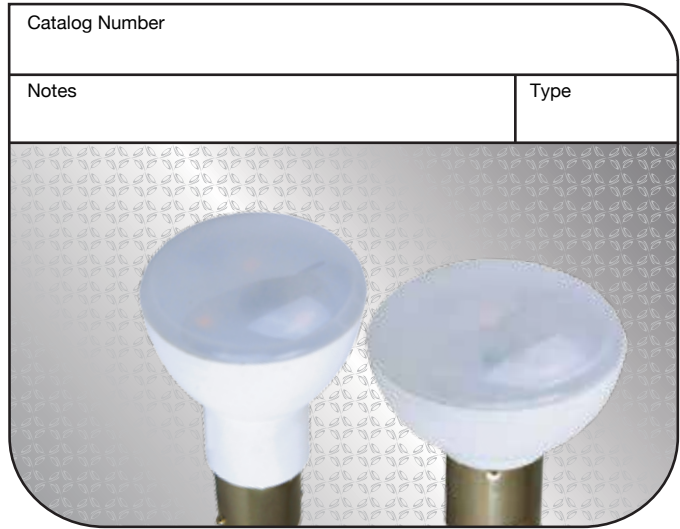

Specifications

Input Line Voltage:	12V VAC/DC
Input Power:	2W
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C
CCT	2700K
CRI	80

Warranties and Certifications:	Item #	Description	Wattage	Lumens	Base Type	CRI	Lamp Life	Voltage	CCT
3 YEAR WARRANTY 	LED2W1383V2	2W 1383 Elevator Lamp - 2700K, Frosted	2	150	BA15S	80	25,000	12V	2700K
	LED2WGBFV2	2W GBF Elevator Lamp - 2700K, Frosted	2	150	BA15D	80	25,000	12V	2700K

For the most up-to-date specs, please visit www.tcpi.com

