



Wet Location PAR38

The performance you expect from TCP PAR Lamps is now available for wet location applications.

Limitless options for the following applications:

- Outdoor Fixtures
- Landscape Lights
- Security Lights

Great features and benefits:

- Energy Efficient: Up to 80% more energy efficient than halogen alternatives
- UL Wet Location Rated
- Exceeds all industry performance requirements
- Long life: Designed for 25,000 hours (lasts at least 15 times longer than halogen alternative)
- Very durable: Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design
- Dimmable



WET LOCATION PAR38



LED
we know light.™

TCP

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP MAR 2016/57163





LED PAR38 Wet Location Spec Sheet

LED Designed for 25,000 Hours average rated life, 120 Volts


Applications:

Ideal for outdoor PAR38 flood and spot light applications.

- + Outdoor Fixtures
- + Landscape Lights
- + Security Lights

Features and Benefits

- Energy Efficient: Up to 80% less energy than halogen alternatives
- UL Wet Location Rated
- Exceeds all industry performance requirements
- Long Life: Designed for 25,000 hours (lasts at least 15 times longer than Halogen alternative)
- Very Durable: Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design
- Dimmable

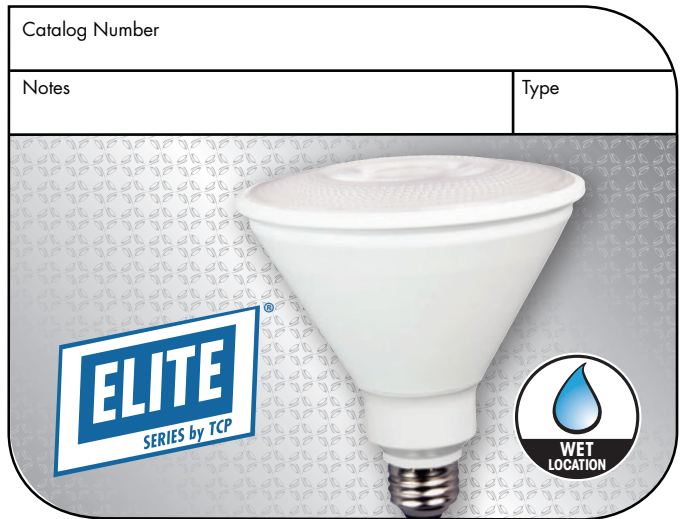

Specifications

	PAR38
Input Line Voltage:	120 VAC
Input Power	14 W
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C



WET LOCATION PAR38

**SUITABLE FOR WET LOCATIONS –
WHEN EXPOSED TO WATER USE
ONLY WITH DEVICE BASE UP**

Warranties and Certificates	Item #	Description	Energy Star	Voltage	Wattage	Incandescent Watt Equivalent	Lumens	LPW	CBCP	Beam Angle	CCT	CRI	
5 YEAR WARRANTY 	14W PAR38 3000K												
	L14P38D30KFLW	Dimmable 14W Wet Location Smooth PAR38 - 3000K 40°		120	14	90W	1000	71.4	1876	40	3000K	82	
	14W PAR38 5000K												
	L14P38D50KFLW	Dimmable 14W Wet Location Smooth PAR38 - 5000K 40°		120	14	90W	1100	78.6	1876	40	5000K	82	

TCP

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP MAR 2016/57163

