



LED Recessed Downlights

BEVELED DESIGNER LOOK • DIMMABLE • 35,000 HOURS

For quick, easy, and affordable LED upgrades, switch to TCP's LED Downlights. TCP downlights have both E26 and direct wire options, PMMA plastic to prevent lens discoloration, and quick snap holding arms to quickly attach to a recessed can. With the new beveled look, these downlights provide smooth even light in the color temperature you need.

LIMITLESS OPTIONS FOR THE FOLLOWING APPLICATIONS

- Commercial
- Retail
- Healthcare
- Industrial
- Residential

FEATURES

- Long life: 35,000 hours
- Very low heat generation
- Excellent color consistency and CRI
- UL approved for damp location
- Durable PMMA plastic housing
- Mounts directly to recessed can: 4 or 6 inch
- E26 or direct wire options
- Smooth, uniform dimming from 100 - 10%

BENEFITS

- Minimizes replacement and maintenance costs
- Perfect for sensitive display lighting such as art galleries
- Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp
- Can be used outdoors when protected from elements—withstands humidity indoors/outdoors
- Prevents discoloration
- Easy installation and integrated trim
- Makes for a quick install

SPECIFICATIONS

| | |
|---|----------------------------|
| Color Temperatures..... | 2700K, 3000K, 4100K, 5000K |
| Wattage options..... | 11W, 12W, 16.5W |
| Input Line Voltage..... | 120 VAC |
| Input Line Frequency..... | 50/60HZ |
| Lamp Life (Rated)..... | 35,000 hours |
| Minimum Starting Temp..... | -22F/-30C |
| Maximum Operating Temp..... | 40°C |
| CRI..... | 80 |
| IC-rated for direct contact with insulation | |




5 YEAR WARRANTY
* Based on 12 hours use per day



5/6 inch Dimmable Downlight



4 inch Dimmable Downlight

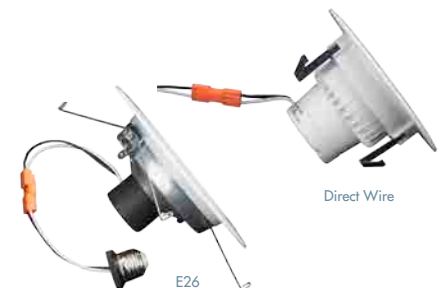

Direct Wire

E26

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP NOV 2018/WF124361rev2





LED Recessed Downlights

BEVELED DESIGNER LOOK • DIMMABLE • 35,000 HOURS

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | INCANDESCENT WATTS | LPW | LUMENS | COLOR | HOURS | CRI | MOL (inches) | DIA (inches) | BEAM ANGLE | BASE | WARRANTY YEARS | |
|--|--------------------------|---------|-------|--------------------|------|--------|-------|--------|-----|--------------|--------------|------------|------|----------------|--|
| LED 75W Equivalent Options | | | | | | | | | | | | | | | |
| 11W DR4 Downlight • Dimmable • 35,000 Hour | | | | | | | | | | | | | | | |
| L75DR4D3527K | LED 11W DR4 DIM 2700K | 120V | 11 | 75 | 85.0 | 850 | 2700K | 35,000 | 80 | 3.0 | 5 | 120° | E26 | 5 | |
| L75DR4D3530K | LED 11W DR4 DIM 3000K | 120V | 11 | 75 | 85.0 | 850 | 3000K | 35,000 | 80 | 3.0 | 5 | 120° | E26 | 5 | |
| L75DR4D3541K | LED 11W DR4 DIM 4100K | 120V | 11 | 75 | 85.0 | 850 | 4100K | 35,000 | 80 | 3.0 | 5 | 120° | E26 | 5 | |
| L75DR4D3550K | LED 11W DR4 DIM 5000K | 120V | 11 | 75 | 85.0 | 850 | 5000K | 35,000 | 80 | 3.0 | 5 | 120° | E26 | 5 | |
| 12W DR56 Downlight • Dimmable • 35,000 Hour | | | | | | | | | | | | | | | |
| L75DR56D3527K | LED 12W DR56 DIM 2700K | 120V | 12 | 75 | 70.8 | 850 | 2700K | 35,000 | 80 | 3.0 | 7.4 | 100° | E26 | 5 | |
| L75DR56D3530K | LED 12W DR56 DIM 3000K | 120V | 12 | 75 | 70.8 | 850 | 3000K | 35,000 | 80 | 3.0 | 7.4 | 100° | E26 | 5 | |
| L75DR56D3541K | LED 12W DR56 DIM 4100K | 120V | 12 | 75 | 70.8 | 850 | 4100K | 35,000 | 80 | 3.0 | 7.4 | 100° | E26 | 5 | |
| L75DR56D3550K | LED 12W DR56 DIM 5000K | 120V | 12 | 75 | 70.8 | 850 | 5000K | 35,000 | 80 | 3.0 | 7.4 | 100° | E26 | 5 | |
| LED 120W Equivalent Options | | | | | | | | | | | | | | | |
| 16.5W DR56 Downlight • Dimmable • 35,000 Hour | | | | | | | | | | | | | | | |
| L120DR56D3527K | LED 16.5W DR56 DIM 2700K | 120V | 16.5 | 120 | 84.8 | 1400 | 2700K | 35,000 | 80 | 3.0 | 7.4 | 120° | E26 | 5 | |
| L120DR56D3530K | LED 16.5W DR56 DIM 3000K | 120V | 16.5 | 120 | 84.8 | 1400 | 3000K | 35,000 | 80 | 3.0 | 7.4 | 120° | E26 | 5 | |
| L120DR56D3541K | LED 16.5W DR56 DIM 4100K | 120V | 16.5 | 120 | 84.8 | 1400 | 4100K | 35,000 | 80 | 3.0 | 7.4 | 120° | E26 | 5 | |
| L120DR56D3550K | LED 16.5W DR56 DIM 5000K | 120V | 16.5 | 120 | 84.8 | 1400 | 5000K | 35,000 | 80 | 3.0 | 7.4 | 120° | E26 | 5 | |



5 YEAR WARRANTY
* Based on 12 hours use per day

For the most up-to-date specs, please visit www.tcpi.com