



## LED UFO High Bay Luminaires

### Great Features/Benefits

TCP's easy-to-install LED UFO High Bay Luminaires have a sleek, robust design that meets a variety of application needs.

Combining long life and outstanding efficacy up to 130LPW, TCP offers a cost effective solution to maximize energy and maintenance savings. These LED luminaires instantly deliver brilliant white light, eliminating long warm-up times experienced with HID fixtures.

- Energy efficient design delivers up to 130 LPW
- Smooth, uniform 0-10V dimming
- Instant on
- Long life: 50,000 hours
- Heavy duty die-cast aluminum housing
- IP65 wet location rated
- Ideal for:
  - Warehouses & Distribution Centers
  - Commercial Facilities
  - Aisles (Open & Stock)
  - Retailers
  - Schools & Municipalities
  - Field Houses & Gymnasiums
  - Open Ceiling Designs



5 YEAR WARRANTY

To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/qpl](http://www.designlights.org/qpl)

# UFO High Bay Luminaires

### Applications

This product can be effectively used in many indoor applications such as Warehouses, Commercial Facilities, Retail Stores, Schools, Gymnasiums, or any open ceiling design.

### Construction

- IP65 rated
- Die-cast aluminum housing
- Impact resistant tempered glass
- Durable black powder coat
- Hangs from an included eye bolt
- Operating temperature: -20°C - 50°C

### Electrical


- cULus wet location rated
- Power cord and dimming leads extend from the top
- System rated for long 50,000 hour life
- Efficiently delivers up to 130 LPW

### Optics

- Clear tempered glass lens
- Delivers bright, white light and excellent uniformity



<b>Warranty</b> Five year limited warranty against defects in manufacturing.  DLC v4.3 Standard	<b>Listings</b> UL and cUL listed IP65 Rated
--	--

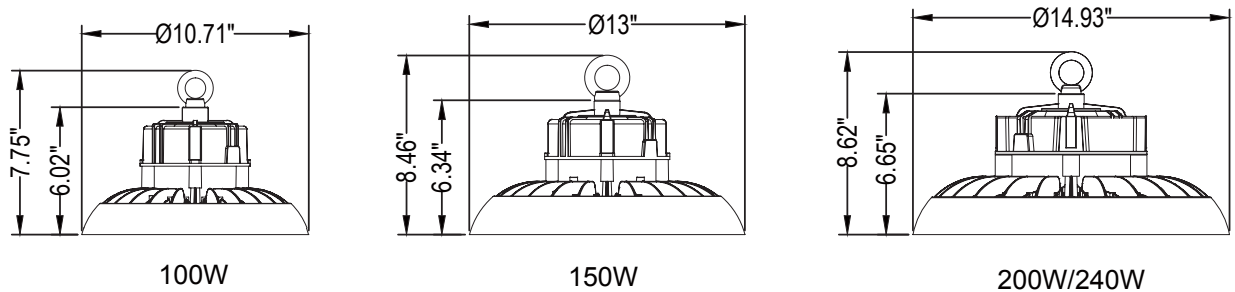

For the most up-to-date specs and warranty information, please visit [www.tcpi.com](http://www.tcpi.com)

ITEM #	DESCRIPTION	DLC	LUMENS	WATTAGE	LPW	VOLTAGE	POWER FACTOR	CCT	CRI	LIFE(hours)	L(in.)	H(in.)	W(in.)
<b>LED UFO High Bay • 50,000 Hour</b>													
UFO100D00140	RND HB UNI 010 DIM 12000L 40K	★	13000	100	130	120-277V	>90	4000K	80	50000	10.71	7.75	10.71
UFO100D00150	RND HB UNI 010 DIM 12000L 50K	★	13000	100	130	120-277V	>90	5000K	80	50000	10.71	7.75	10.71
UFO150D00140	RND HB UNI 010 DIM 19000L 40K	★	19500	150	130	120-277V	>90	4000K	80	50000	13	8.46	13
UFO150D00150	RND HB UNI 010 DIM 19000L 50K	★	19500	150	130	120-277V	>90	5000K	80	50000	13	8.46	13
UFO200D00140	RND HB UNI 010 DIM 25000L 40K	★	26000	200	130	120-277V	>90	4000K	80	50000	14.93	8.62	14.93
UFO200D00150	RND HB UNI 010 DIM 25000L 50K	★	26000	200	130	120-277V	>90	5000K	80	50000	14.93	8.62	14.93