

For outdoor surface mount applications, the best choice is the QLS Canopy series. Utilizing a single high powered Chip on Board LED, with a weatherproof, prismatic lens, the Canopy spreads light across your application. Save time and energy by using a QLS Canopy Luminaire.

FEATURES


- Tough aluminum frame
- Non-strobing driver
- Clear polystyrene prismatic lens
- Single point of light (COB LED)
- Wet location and IP65 rated
- Life: L70 50,000 Hours
- Mounts directly to junction box
- Operating temperature: -4° to 133°F
- 150 or 250W HID Equivalent
- Photocells available by special order

APPLICATIONS

This product family can be effectively used in outdoor surface mount locations. Commercial, industrial, retail and healthcare exterior lighting; Parking Lot , Security, canopy lighting, ETC.

OPTIONS/ACCESSORIES

Photocell (special order) Add "PC" to end of Item#

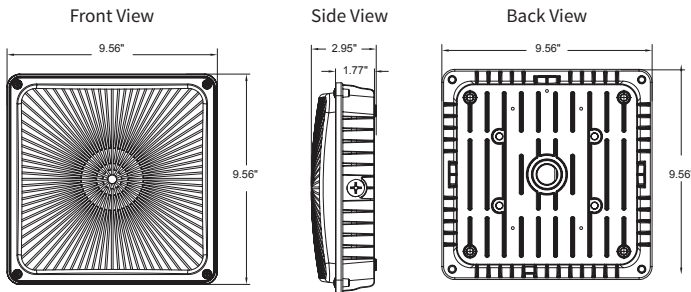

Approximate Luminaire Weight: 5.3 lbs

ITEM NUMBER GUIDE ex. CP450040


Family	Lumen Pkg	Place-holder	CCT
CP	45	00	40
	70		50

↓ ↓ ↓ ↓
CP 45 00 40

QLS	Watt.	Lumens	Eff L/W	Volt.	P.F.	Dim.	CCT	CRI	Case QTY	Watt. Equiv.	Life	L (In)	H (In)	W (In)
CP4500127	45	5250	116	AC120-277	≥0.9	No	2700	80	1	150	50000	9.56	9.56	2.95
CP4500140	45	5350	118	AC120-277	≥0.9	No	4000	80	1	150	50000	9.56	9.56	2.95
CP4500150	45	5450	121	AC120-277	≥0.9	No	5000	80	1	150	50000	9.56	9.56	2.95
CP7000127	70	7400	105	AC120-277	≥0.9	No	2700	80	1	250	50000	9.56	9.56	2.95
CP7000140	70	7600	108	AC120-277	≥0.9	No	4000	80	1	250	50000	9.56	9.56	2.95
CP7000150	70	7800	111	AC120-277	≥0.9	No	5000	80	1	250	50000	9.56	9.56	2.95

Photometrics

Luminous Intensity Distribution Curve (50W)

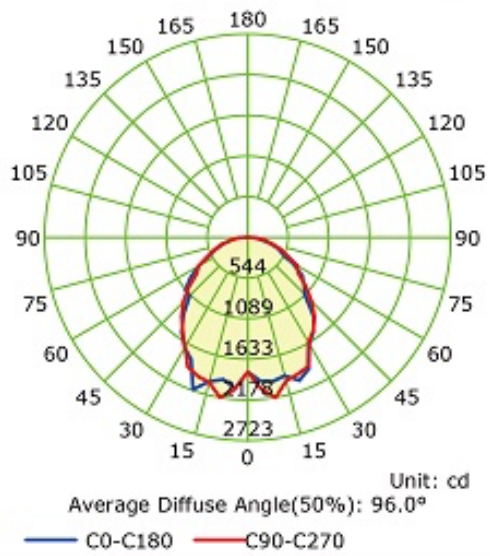

Luminous Intensity Distribution Curve (70W)

