




The QLS Wall Pack is a rough and ready tool to ensure your building is well lit, and your people are safe. Offering a tough, weatherproof, aluminum frame with a clear polystyrene lens, this wall pack offers superior light protection, while its 144 LEDs reduce cost and greatly improve product life. Fits to existing wall pack hardware for quick remounts. Available with a state of the art microwave photocell that switches light output based on occupancy between 10% to 100%.

### FEATURES

- Aluminum frame with non-yellowing polystyrene cover
- Built-in installation level
- Wet location and IP65 rated
- Insect resistant
- Mounts directly to existing wall pack fixtures
- Microwave photocell detector available
- Operating temperature: -4° to 133°F
- 150 or 275W HID Equivalent.

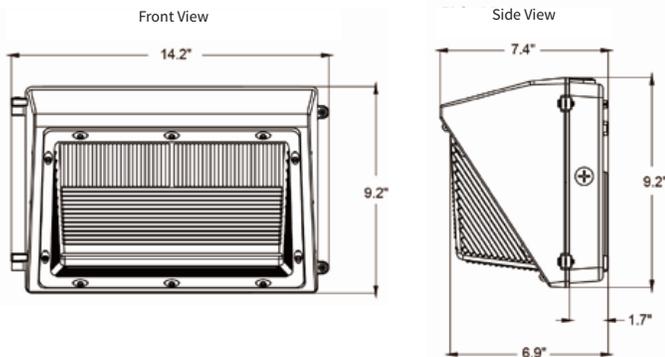

### APPLICATIONS

This product family can be effectively used in outdoor wall mount locations. Commercial, industrial, retail and healthcare exterior lighting; parking lot , cargo door, high wall, area, security, etc.

### OPTIONS/ACCESSORIES

Photocell (available separately)      Item# Pending

### ITEM NUMBER GUIDE      ex. WP12000150


Family	Lumen Pkg	Place-holder	CCT
WP	55	001	40
	60		50
	120		

↓ ↓ ↓ ↓  
WP 120 001 50

QLS	Watt.	Lumens	Eff L/W	Volt.	P.F.	Dim.	CCT	CRI	Case QTY	Watt. Equiv.	Life	L (In)	H (In)	D (In)
WP5500140	60	6867	115	AC120-277	≥0.9	No	4000	85	1	175	50000	14.2	9.2	7.4
WP5500150	55	6900	125	AC120-277	≥0.9	No	5000	80	1	175	50000	14.2	9.2	7.4
WP12000140	120	14500	120	AC120-277	≥0.9	No	4000	85	1	250	50000	14.2	9.2	7.4
WP12000150	120	14000	116	AC120-277	≥0.9	No	5000	80	1	250	50000	14.2	9.2	7.4

# Photometrics


WP55001

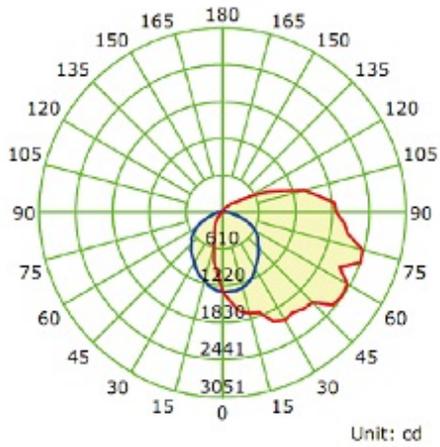

Unit: cd


	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% I <sub>max</sub> ):	109.6	109.8	107.7	107.9	108.8
Field Angle (10% I <sub>max</sub> ):	162.4	172.9	162.5	172.5	167.6

WP120001

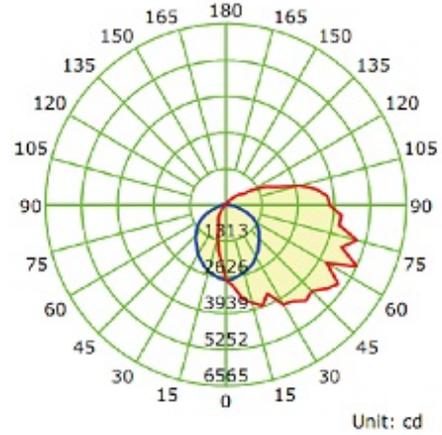


Unit: cd

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% I <sub>max</sub> ):	108.5	116.1	106.0	113.7	111.1
Field Angle (10% I <sub>max</sub> ):	161.5	177.2	162.9	177.7	169.8

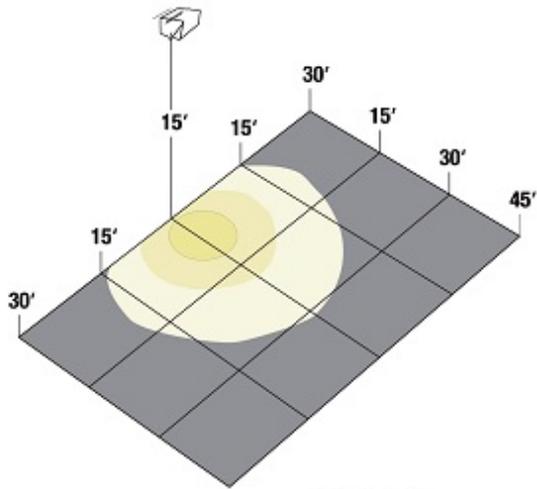

WP55001

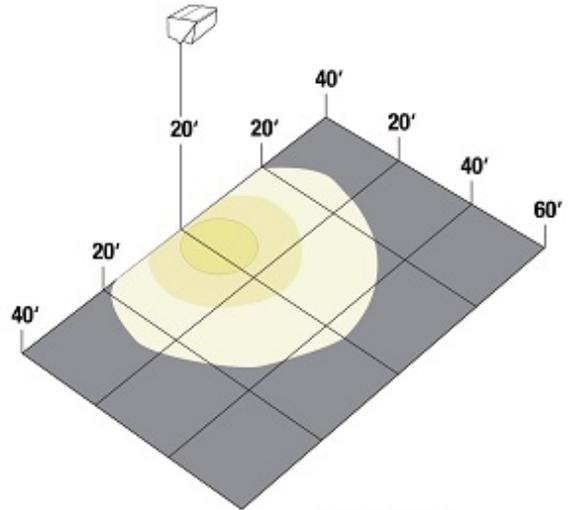

WP120001