



# LED Residential Cylinder Security Sconce

## Product Specifications



Increase safety of residential and commercial spaces with TCP's LED Residential Cylinder Security Sconce. The long life, ultra-bright lamp heads and rechargeable NiCd battery make this light the perfect low-maintenance solution for outdoor spaces. And, in the event of a power outage, the internal transfer switch automatically connects the battery to the lamp heads for a minimum 90-minute emergency illumination.

## Reasons to choose LED Residential Cylinder Security Sconce from TCP

- Ultra-bright white LEDs
- Decorative, low-profile architectural design
- Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and to meet electrical and life safety codes
- Long life, rechargeable NiCd battery
- 90-minute emergency battery illumination
- Five-year warranty on electronics and housing; battery prorated for five years
- Wet location rated

## Construction

- Decorative, low-profile, architectural design
- Durable powder-coated finish in bronze
- Die-cast aluminum housing

## Specifications


Input Line Voltage .....	120-277V
Wattage(W).....	12W (2 LEDs x 6W)
Minimum Start Temp* .....	32°F (0°C)
Maximum Operating Temp.....	122°F (50°C)
Lamp Life .....	50,000 hours
Battery .....	4.8V
Warranty .....	Five-year limited

### Listings

UL Listed for wet locations, meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes; Certified to CEC under Title 20 regulations

### Warranty

Five-year warranty on electronics and housing; battery prorated for five years

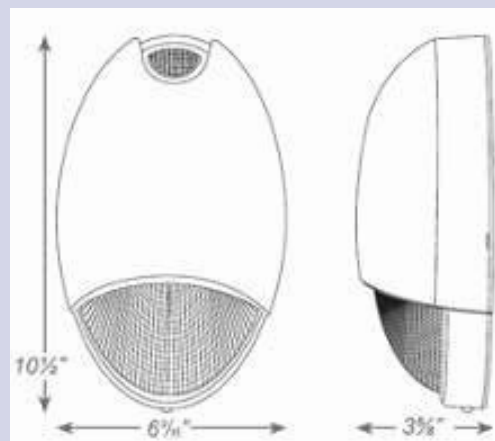

## Electrical

- Charge rate/power "ON" LED indicator light and push-to-test switch for code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects internal battery to LED lamp board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Photocell control sensor as standard for use as a dusk-to-dawn luminaire
- Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and to meet electrical and life safety codes
- Field-selectable wiring allows for AC operation of unit to be controlled using a wall switch, photocell, or other switching mechanism
- \*RSSCCBRZCW has an internal heater for cold temperature applications with a minimum starting temperature of -22°F (-30° C)

## Installation

- Universal knockout pattern on backplate for surface mount
- Threaded opening at top of enclosure for conduit mount

LED Residential Cylinder Security Sconce			
ITEM #	DESCRIPTION	HOUSING COLOR	MINIMUM START TEMPERATURE
RSSCCBRZSDT	LED RESIDENTIAL CYLINDER SECURITY SCONCE	BRONZE	32° F (0° C)
RSSCCBRZCW	LED RESIDENTIAL CYLINDER SECURITY SCONCE - COLD WEATHER	BRONZE	-22° F (-30° C)

# TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 30 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit [tcpi.com](http://tcpi.com)

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516