

3-Way CFL SpringLamps®

10,000 Hours average rated life, 120 V

Applications:

Perfect for all 3-WAY applications: Use where a standard incandescent is used.

- + Table Lamps
- + Floor Lamps




Special Application Options: (Ordering Suffix)

- 3000°K (30K), 3500°K (35K), 4100°K (41K), 5000°K (50K), 6500°K (65K)

Features and Benefits

- Excellent energy saving choice for 3-way table and floor lamps
- Provides great light output and color rendition
- All products feature 3 distinct light levels
- Lowest level can be used for night light applications
- 19030LED night light level uses only 1 watt
- 19027 small MOL perfect for small lamp harps

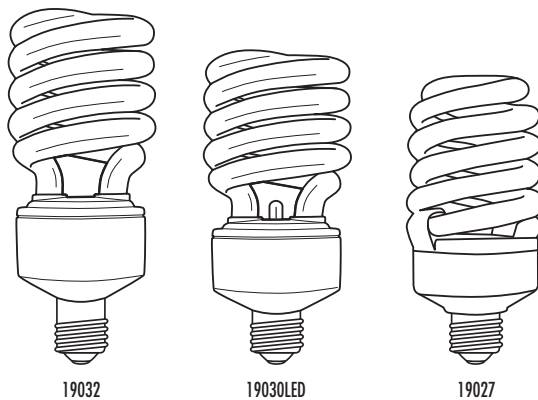

19032

19030LED

19027

Catalog Number

Notes

Type



Specifications (at full brightness)

End of Life Protection	Yes
Ballast Type	Electronic
Input Line Voltage:	120VAC
Input Line Frequency	50/60HZ
Lamp Life (Rated)	10,000 hrs
Color Temperature	2700°K
Color Rendering Index	82
Minimum Starting Temp	0°F
Maximum Operating Temp	140°F
UL/cUL Listed	Yes
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	<1.60
Maximum Open Circuit Voltage	600V
Power Factor	>.50
Total Harmonic Distortion	<150%

TCP reserves the right to void the warranty for any misapplication of these products.

Warranties and Certifications:	Item #	Description	Wattage	Incandescent Wattage Comparison	Initial Lumens	M.O.L. (inches)	Diameter (inches)	Input Line Current
18 MONTH WARRANTY 	19027	3-Way Full SpringLamp	11/15/27	40/60/100	500/850/1750	5.2	2.4	.45A
	19030LED	3-Way SpringLamp w/LED night light	1/19/30	night light/75/120	1/1300/1850	5.3	2.8	.50A
	19032	3-Way SpringLamp	14/19/32	40/75/150	750/1400/2150	6.8	2.8	.53A

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP JUN 2024/WF549505