





F54T5HO/850 Lamp Specifications

TCP Item Number: 31054850

Lamp code: F54T5HO/850

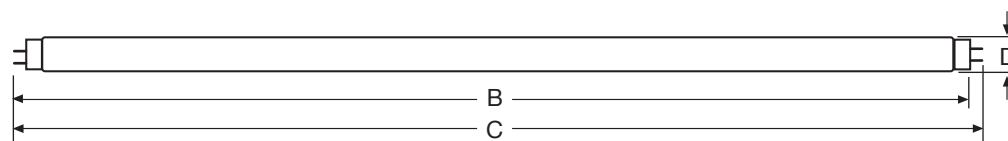

Cathode Guarded

Average Rated Life (hours)
3 hours per start ----- 24,000

TCLP Compliant ----- Yes

Low Mercury ----- Yes

Physical Characteristics

Lamp Type ----- T5

Base Type ----- Miniature Bipin

Lamp Material ----- Soda Lime

Phosphor ----- Tri-Phosphor

Lamp Diameter (inches)

Nominal (D) ----- .625

Maximum (D) ----- .670

Overall Length (inches)

Nominal (C) ----- 45.2

Maximum (C) ----- 45.8

Face to End of opposing pin (inches)

Maximum (B) ----- 45.52

Minimum (B) ----- 45.42

Photometric Characteristics

Initial Lumens ----- 5000

Mean Lumens (40% of rated life) ----- 4750

Correlated Color Temperature (Kelvin) ----- 5000

Color Rendering Index (CRI) ----- 85

Normal Efficacy (Lumens/Watts) ----- 92.6

Electrical Characteristics

Lamp Watts ----- 54

Nominal Lamp Volts ----- 118

Nominal Lamp Operating Frequency (Hz) -- 50-60 Hz


Min. Starting Temperature (°C) ----- -20

Min. Starting Lamp Voltage at 10°C ----- 520


Min. Cathode Resistance (Rh/Rc) ----- 4.25

Max. Cathode Resistance (Rh/Rc) ----- 6.5


Spectral Power Distribution

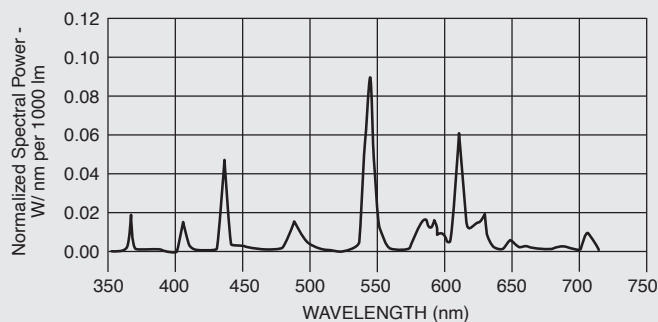

Lamp Lumen Maintenance

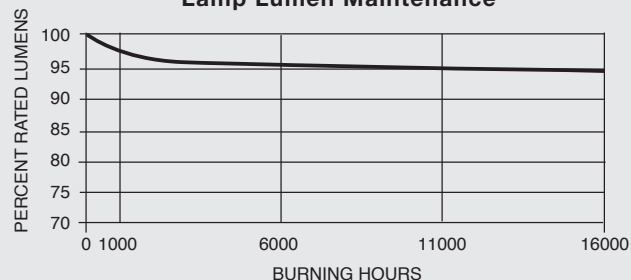

Typical Lamp Mortality

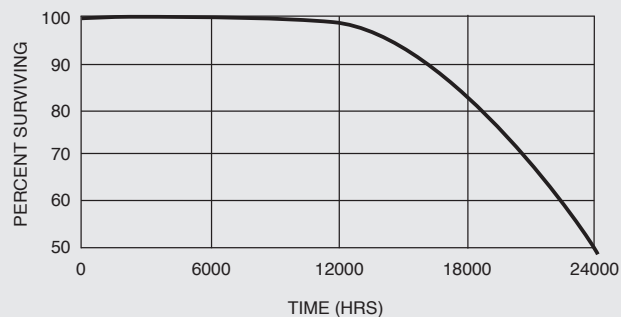

24 MONTH
STANDARD WARRANTY

For the most up-to-date specs, please visit www.tcp.com

*Testing performed with Instant Start Ballast.

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP JUN 2024/WF549511