



T9 Circline Lamp / Adapter Specifications

T9 Circline Compact Fluorescent

10,000 Hours

Applications:

Use anywhere a standard incandescent is used.

- + Table Lamps
- + Floor Lamps
- + Ceiling Fixtures




Special Applications Options (Ordering Suffix):


- 3100°K (31K), 3500°K (35K), 4100°K (41K), 5100°K (51K), 6500°K (65K)

Features and Benefits

- Long life CFL, 10,000 hours average rated life
- Lasts 7 years, based on 4 hours use per day
- Lasts 10-13 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- Saves up to 75% in Energy Costs compared to similar light output incandescent lamps
- 2700°K color temperature – closest to incandescent light
- Instant start, flicker free
- Quick run-up time – Instant start, flicker free!
- World class phosphor insures high lumen output and excellent lumen maintenance



16530L

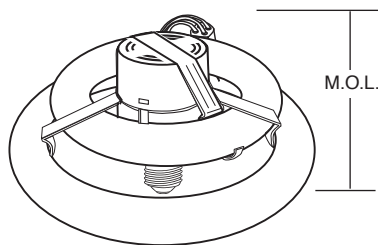


16555L

M.O.L.

Catalog Number

Notes

Type

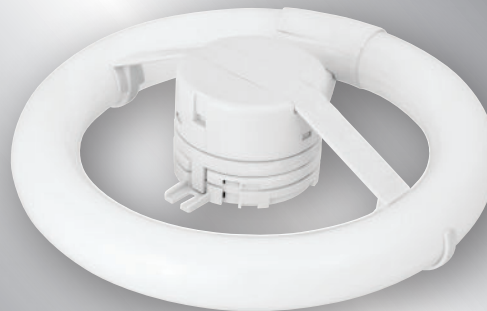

Specifications (at full brightness)

End of Life Protection.....	Yes
Bracket Type	Bent Wing
Ballast Type	Electronic
Starting Method.....	Modified Rapid Start
Input Line Voltage	120VAC
Input Line Frequency	50/60HZ
Lamp Life (rated)	10,000 Hours
Ballast Life (rated)	50,000 Hours
Color Temperature	2700°K
Color Rendering Index	82
Min. Starting Temperature	-20 ° F
Max. Operating Temperature	160 ° F
U.L. / C.U.L. Listed	Yes
FCC Compliance	Part 18, Subpart C
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	< 1.60
Max. Open Circuit Voltage	600V

Warranties and Certifications:	Item #	Description	Ballast Wattage	Lamp Wattage	Incandescent Wattage Comparison	Initial Lumens	MOL (inches)	Diameter (inches)	Power Factor	THD	Ballast Replacement	Lamp Replacement
 ISO 9002 CERTIFIED 15 MONTH WARRANTY	17022/20	T9 Lamp with Ballast	22	20	75	1200	3.65	6	> .50	< 150%	17022	32020
	17022L	T9 Lamp with Ballast	22	22	90	1400	3.65	8	> .50	< 150%	17022	32022
	17030L	T9 Lamp with Ballast	30	30	120	2000	3.65	9	> .50	< 150%	17030	32030
	17036/30	T9 Lamp with Ballast	36	30	125	2100	3.65	9	> .50	< 150%	17036	32030
	12522/20	T9 Lamp with Ballast	22	20	75	1200	3.65	6	> .95	< 24%	12522	32020
	12522L	T9 Lamp with Ballast	22	22	90	2400	3.65	8	> .95	< 24%	12522	32022
	12530L	T9 Lamp with Ballast	30	30	120	1400	3.65	9	> .95	< 24%	12530	32030
	12536/30	T9 Lamp with Ballast	36	30	125	2000	3.65	9	> .95	< 24%	12536	32030

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP JUN 2024/VNF549503