



LED Selectable Commercial Recessed Downlights Diffuser Version

Color & Wattage Selectable
Product Specifications



TCP's Selectable Commercial Recessed Downlights offer choices for color temperatures and wattages, making these adaptable for many situations.

Reasons to choose LED Selectable Commercial Recessed Downlights - Diffuser Version from TCP

- 3 selectable wattages
- Selectable colors (30K/35K/41K) or (27K/50K)
- 50,000 hour rated life minimizes replacement and maintenance costs
- Flicker-free design for consistent lighting
- Mounts directly to ceiling: 4, 6, 8, 10 or 12 inch
- Shatter resistant
- Easy installation and integrated trim
- Snap clips allow for installation without a recessed can
- 85° beam angle (4"/6"/8"/10")
- 70° beam angle (12")
- Smooth, uniform dimming 100 - 5%
- Matte silver and white finishes available

Ideal Applications

- Commercial
- Retail
- Industrial
- Healthcare

Specifications

Color Temperatures.....(30K/35K/41K) or (27K/50K)
 Wattage Options 4" (7/9/12W), 6" (8/10/15W),
 8" (11/15/19W), 10" (18/23/30W),
 12" (18/23/30W)
 Input Line Voltage 120-277V
 Input Line Frequency..... 50/60Hz
 Dimming..... 0-10V

Lamp Life (rated)..... 50,000 hours
 Minimum Starting Temp -22°F/-30°C
 Maximum Operating Temp..... 104°F/40°C
 CRI..... 80
 IC rated for direct contact with insulation
 UL approved for damp locations



*Based on 12 hours use per day

Specifications



Silver Matte Finish



White Finish

Selectable Commercial Recessed Downlight Diffuser Version (30K,35K,41K)

ITEM #	DESCRIPTION	VOLTAGE	INCAND. WATTS	WATTAGE	LUMENS									LPW	CRI	CASE QTY
					LOWEST WATTAGE			MIDDLE WATTAGE			HIGHEST WATTAGE					
					30K	35K	41K	30K	35K	41K	30K	35K	41K			
4" Selectable Commercial Recessed Downlight – 65 Watt Replacement • 50,000 Hour																
DLC4SWUZDCCT (Matte Silver Finish)	LED 4" Comm Downlight CCT	120-277	65	7/9/12	675	695	690	870	900	895	1150	1200	1190	LW: 96.4/99.3/98.6 MW: 96.7/100/99.4 HW: 95.8/100/99	80	8
DLC4SWUZDCCTW (White Finish)					675	695	690	870	900	895	1150	1200	1190			
6" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour																
DLC6SWUZDCCT (Matte Silver Finish)	LED 6" Comm Downlight CCT	120-277	85	8/10/15	820	850	865	1030	1080	1095	1430	1530	1515	LW:103/106/108 MW:103/108/110 HW: 95/102/101	80	8
DLC6SWUZDCCTW (White Finish)					820	850	865	1030	1080	1095	1430	1530	1515			
8" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour																
DLC8SWUZDCCT (Matte Silver Finish)	LED 8" Comm Downlight CCT	120-277	85	11/15/19	1270	1300	1305	1720	1705	1775	2085	2150	2085	LW:115.5/118.2/119 MW:115/113.7/118.3 HW:110/113.2/110	80	4
DLC8SWUZDCCTW (White Finish)					1270	1300	1305	1720	1705	1775	2085	2150	2085			
10" Selectable Commercial Recessed Downlight – 100 Watt Replacement • 50,000 Hour																
DLC10SWUZDCCT (Matte Silver Finish)	LED 10" Comm Downlight CCT	120-277	100	18/23/30	2100	2150	2150	2590	2660	2660	3205	3330	3305	LW:116.7/119.4/119.4 MW:112.6/115.7/115.7 HW:106.8/111/110.2	80	1
DLC10SWUZDCCTW (White Finish)					2100	2150	2150	2590	2660	2660	3205	3330	3305			
12" Selectable Commercial Recessed Downlight – 125 Watt Replacement • 50,000 Hour																
DLC12SWUZDCCT (Matte Silver Finish)	LED 12" Comm Downlight CCT	120-277	125	18/23/30	2110	2160	2180	2650	2690	2690	3260	3380	3360	LW:117.2/120/121.1 MW:115.2/117/117 HW:108.7/112.7/112	80	1
DLC12SWUZDCCTW (White Finish)					2110	2160	2180	2650	2690	2690	3260	3380	3360			



LED Selectable Commercial Recessed Downlights Diffuser Version

Specifications

Selectable Commercial Recessed Downlight Diffuser Version (27K,50K)

ITEM #	DESCRIPTION	VOLTAGE	INCAND. WATTS	WATTAGE	LUMENS						LPW	CRI	CASE QTY
					LOWEST WATTAGE		MIDDLE WATTAGE		HIGHEST WATTAGE				
					27K	50K	27K	50K	27K	50K			
4" Selectable Commercial Recessed Downlight Diffuser Version – 65 Watt Replacement • 50,000 Hour													
DLC4SWUZDCCT2 (Matte Silver Finish) DLC4SWUZDCCT2W (White Finish)	LED 4" Comm Downlight Diffuser CCT	120-277	65	7/9/12	700	750	900	1000	1200	1300	LW:100/107.1 MW:100/111.1 HW:100/108.3	80	8
6" Selectable Commercial Recessed Downlight Diffuser Version – 85 Watt Replacement • 50,000 Hour													
DLC6SWUZDCCT2 (Matte Silver Finish) DLC6SWUZDCCT2W (White Finish)	LED 6" Comm Downlight Diffuser CCT	120-277	85	8/10/15	700	750	1000	1050	1450	1500	LW: 87.5/93.8 MW:100/105 HW: 96.7/100	80	8
8" Selectable Commercial Recessed Downlight Diffuser Version – 85 Watt Replacement • 50,000 Hour													
DLC8SWUZDCCT2 (Matte Silver Finish) DLC8SWUZDCCT2W (White Finish)	LED 8" Comm Downlight Diffuser CCT	120-277	85	11/15/19	1200	1300	1600	1650	2000	2050	LW:109.1/118.2 MW:106.7/110 HW:105.3/107.9	80	4
10" Selectable Commercial Recessed Downlight Diffuser Version – 100 Watt Replacement • 50,000 Hour													
DLC10SWUZDCCT2 (Matte Silver Finish) DLC10SWUZDCCT2W (White Finish)	LED 10" Comm Downlight Diffuser CCT	120-277	100	18/23/30	1800	1850	2250	2300	2850	2950	LW:100/102.8 MW: 97.8/100 HW: 95/98.3	80	1
12" Selectable Commercial Recessed Downlight Diffuser Version – 125 Watt Replacement • 50,000 Hour													
DLC12SWUZDCCT2 (Matte Silver Finish) DLC12SWUZDCCT2W (White Finish)	LED 12" Comm Downlight Diffuser CCT	120-277	125	18/23/30	1800	1850	2250	2300	2850	2950	LW:100/102.8 MW: 97.8/100 HW: 95/98.3	80	1




Accessories

PRODUCT	ITEM NUMBER	DESCRIPTION	DIMENSIONS
	46INFRAMEKIT	4"/6" ADJUSTABLE FRAME KIT (Compatible with 4" and 6" downlights)	NA
	EMBACKUPCOMDL1	EMERGENCY BACKUP FOR 4" AND 6" SELECTABLE COMMERCIAL DOWNLIGHT	9.45" X 1.77" X 1.18"
	EMBACKUPCOMDL2	EMERGENCY BACKUP FOR 8", 10" AND 12" SELECTABLE COMMERCIAL DOWNLIGHT	12.9" X 2.6" X 2.2"

Dimensions

A	B	C	Item Number
5"	6.2"	4.5"	DLC4SWUZDCCT / DLC4SWUZDCCT2 / DLC4SWUZDCCTW / DLC4SWUZDCCT2W
6.4"	7.8"	5.6"	DLC6SWUZDCCT / DLC6SWUZDCCT2 / DLC6SWUZDCCTW / DLC6SWUZDCCT2W
7.4"	9.2"	7.3"	DLC8SWUZDCCT / DLC8SWUZDCCT2 / DLC8SWUZDCCTW / DLC8SWUZDCCT2W
8.2"	10.9"	9"	DLC10SWUZDCCT / DLC10SWUZDCCT2 / DLC10SWUZDCCTW / DLC10SWUZDCCT2W
9.5"	13"	11"	DLC12SWUZDCCT / DLC12SWUZDCCT2 / DLC12SWUZDCCTW / DLC12SWUZDCCT2W

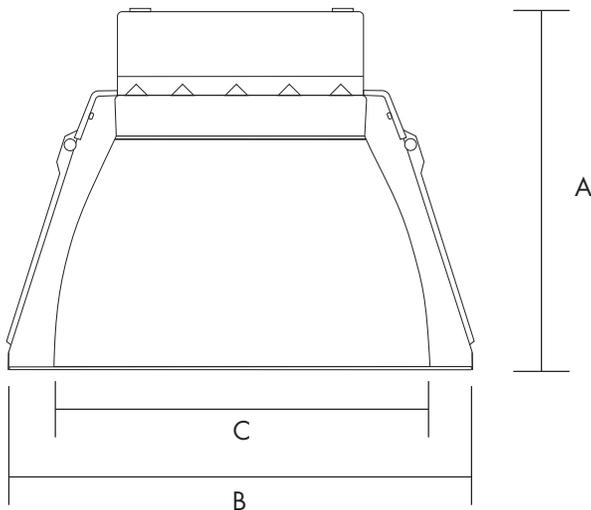

For the most up-to-date specs, please visit www.tcp.com

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 30 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516