



LED Retrofit Flat Panel

Product Specifications



TCP's LED Flat Panel Troffer Retrofit Kit offers a high-efficiency alternative to T5, T8, and T12 linear fluorescent systems. It provides long-life with consistent color and superior lumen maintenance. The rugged, cold-rolled steel housing is post-painted with a matte white finish. The acrylic diffuser provides a low-glare, wide-light distribution.

The LED Flat Panel Troffer Retrofit Kit offers a cost-effective solution to maximize savings and take advantage of potential utility rebates without sacrificing performance.

Reasons to choose the LED Flat Panel Troffer Retrofit Kit from TCP

- Uses up to 61% less energy than fluorescent alternatives
- Long 50,000 hour rated life
- Excellent color consistency and CRI
- Mercury free
- Frosted acrylic diffuser
- Slim, low-profile design

Ideal Applications

- Offices
- Retail Stores
- Schools
- Hospitality
- Restaurants
- Healthcare





LED Retrofit Flat Panel

Specifications

Input Line Voltage	120-277V
Input Line (Hz)	50/60Hz
Wattage (W)	
1x4	
SW2	32W/26W/18W/15W
2x2	
SW2	32W/26W/18W/15W
2x4	
SW3	36W/26W/22W/18W
Lumens (L)	
1x4	
SW2	4600L/3800L/2800L/2200L
2x2	
SW2	4600L/3800L/2800L/2200L
2x4	
SW3	5200L/3800L/3200L/2800L
Lumens Per Watt (LPW)	>150LPW
Rated Life	50,000 hours
Minimum Starting Temperature	-20°C
Maximum Operating Temperature	50°C
CRI	>80
Power Factor	>90%
THD	<20%
Ratings	UL/cUL damp location rated, IC Rated
Controls	0-10V dimming (standard)



Replacement Strategy

SYSTEM	BALLAST FACTOR	LUMENS	INPUT WATTS*	LED ENERGY SAVINGS
TCP LED Flat Panel Troffer - 2x2	—	4600	32	—
2 Lamp 34W T12 U-Bend	0.88	4420	74	59%
2 Lamp 32W T8 U-Bend	0.88	4275	58	48%
2 Lamp 24W T5HO	1.0	3145	54	44%
TCP LED Flat Panel Troffer - 2x4	—	5200	36	—
3 Lamp 32W T8 HBF	1.18	6960	93	63%
3 Lamp 32W T8 NBF	0.88	6681	89	60%
2 Lamp 32W T8 HBF	1.18	4658	65	45%
2 Lamp 28W T5	1.0	4675	63	43%
2 Lamp 32W T8 NBF	0.88	4468	59	39%

*Actual wattage may differ by +/- 5%, when operating between 120-277V +/- 10%.

NOTE: Charts show system lumens (delivered lumens), NOT straight lamp lumen output. This is calculated as follows:
System lumens = mean lumens x # lamps x ballast factor x luminaire efficiency factor





1x4 LED Retrofit Flat Panel

Applications

The TCP LED Flat Panel Troffer Retrofit Kit is a high-efficiency alternative to T5, T8, and T12 linear fluorescent troffers. Their intelligent high-performance LED light engines and drivers deliver long-life, consistent color, and superior lumen maintenance. Applications include offices, schools, retail and hospital locations.

Construction

The TCP LED Flat Panel Troffer Retrofit Kit is constructed of rugged cold-rolled steel, post-painted with a matte white finish, and an acrylic diffuser.

Electrical

All electrical components are cULus listed. TCP high-efficiency drivers provide consistent power to ensure even lighting from the long-life LEDs. Each driver is wattage selectable and is paired with a high-quality LED light engine to deliver long-life and high-quality light. Full range 0-10V dimming is optional.

Optics

The acrylic diffuser conceals the LEDs while providing a highly-diffused, low-glare light. The smooth white reflector integrates into the diffuser creating soft illumination while distributing the light evenly in a wide pattern.

Item Number	
Notes	Type



Listings

UL/cUL Listed
RoHS Compliant
IC Rated
DLC 6.0 RoHS Compliant

Lumen Maintenance

L90 > 36,000 hours

Warranty

Five year limited warranty against defects in manufacturing.


Catalog Ordering Matrix Example: FRK1UZDSW25CCT

FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE (LUMEN PACKAGE) ^{1,2}	COLOR TEMPERATURE
FRK = Flat Panel Retrofit Kit	1 = 1' x 4'	U = 120V-277V	ZD = 0-10V Dimming	SW2 = 32W/26W/18W/15W Selectable (4600L/3800L/2800L/2200L)	5CCT = 30K/35K/41K/50K/65K

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

² Actual wattage may differ by +/- 5%; when operating between 120-277V +/- 10%.

Dimensions

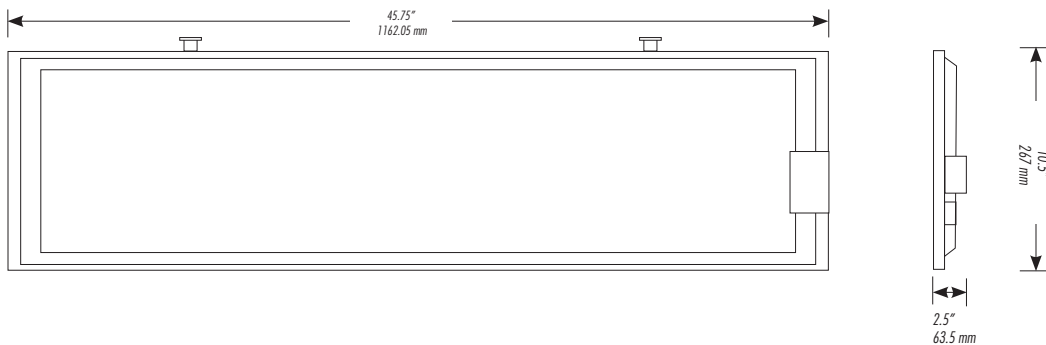

For the most up-to-date specs and warranty information, please visit www.tcpi.com

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com



Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.



2x2 LED Retrofit Flat Panel

Applications

The TCP LED Flat Panel Troffer Retrofit Kit is a high-efficiency alternative to T5, T8, and T12 linear fluorescent troffers. Their intelligent high-performance LED light engines and drivers deliver long-life, consistent color, and superior lumen maintenance. Applications include offices, schools, retail and hospital locations.

Construction

The TCP LED Flat Panel Troffer Retrofit Kit is constructed of rugged cold-rolled steel, post-painted with a matte white finish, and an acrylic diffuser.

Electrical

All electrical components are cULus listed. TCP high-efficiency drivers provide consistent power to ensure even lighting from the long-life LEDs. Each driver is wattage selectable and is paired with a high-quality LED light engine to deliver long-life and high-quality light. Full range 0-10V dimming is optional.

Optics

The acrylic diffuser conceals the LEDs while providing a highly-diffused, low-glare light. The smooth white reflector integrates into the diffuser creating soft illumination while distributing the light evenly in a wide pattern.

Item Number	
Notes	Type

Listings
 UL/cUL Listed
 RoHS Compliant
 IC Rated
 DLC 6.0 RoHS Compliant

Lumen Maintenance
 L90 > 36,000 hours


Warranty
 Five year limited warranty against defects in manufacturing.

Catalog Ordering Matrix Example: FRK2UZDSW25CCT

FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE (LUMEN PACKAGE) ^{1,2}	COLOR TEMPERATURE
FRK = Flat Panel Retrofit Kit	2 = 2' x 2'	U = 120V-277V	ZD = 0-10V Dimming	SW2 = 32W/26W/18W/15W Selectable (4600L/3800L/2800L/2200L)	5CCT = 30K/35K/41K/50K/65K

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.
² Actual wattage may differ by +/- 5%; when operating between 120-277V +/- 10%.

Dimensions

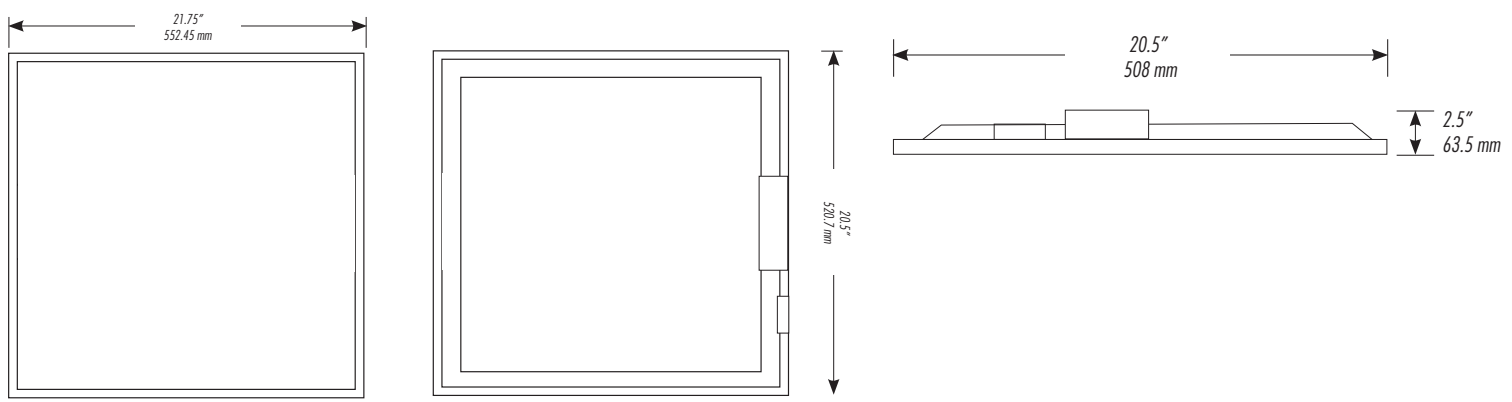

For the most up-to-date specs and warranty information, please visit www.tcpi.com

TCP®
 325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com



Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.



2x4 LED Retrofit Flat Panel

Applications

The TCP LED Flat Panel Troffer Retrofit Kit is a high-efficiency alternative to T5, T8, and T12 linear fluorescent troffers. Their intelligent high-performance LED light engines and drivers deliver long-life, consistent color, and superior lumen maintenance. Applications include offices, schools, retail and hospital locations.

Construction

The TCP LED Flat Panel Troffer Retrofit Kit is constructed of rugged cold-rolled steel, post-painted with a matte white finish, and an acrylic diffuser.


Electrical

All electrical components are cULus listed. TCP high-efficiency drivers provide consistent power to ensure even lighting from the long-life LEDs. Each driver is wattage selectable and is paired with a high-quality LED light engine to deliver long-life and high-quality light. Full range 0-10V dimming is optional.

Optics

The acrylic diffuser conceals the LEDs while providing a highly-diffused, low-glare light. The smooth white reflector integrates into the diffuser creating soft illumination while distributing the light evenly in a wide pattern.

Item Number	
Notes	Type



Listings
 UL/cUL Listed
 RoHS Compliant
 IC Rated
 DLC 6.0 RoHS Compliant

Lumen Maintenance
 L90 > 36,000 hours


Warranty
 Five year limited warranty against defects in manufacturing.

Catalog Ordering Matrix Example: FRK4UZDSW35CCT

FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE (LUMEN PACKAGE) ^{1,2}	COLOR TEMPERATURE
FRK = Flat Panel Retrofit Kit	4 = 2' x 4'	U = 120V-277V	ZD = 0-10V Dimming	SW3 = 36W/26W/22W/18W Selectable (5200L/3800L/3200L/2800L)	5CCT = 30K/35K/41K/50K/65K

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.
² Actual wattage may differ by +/- 5%; when operating between 120-277V +/- 10%.

Dimensions

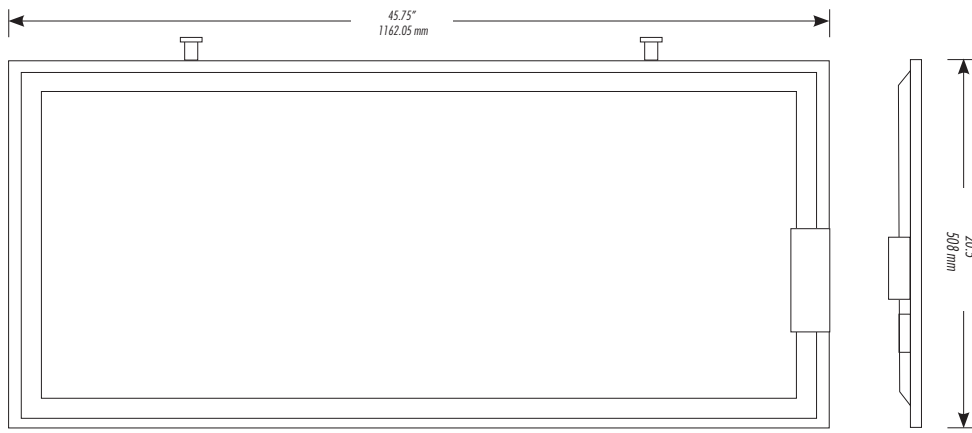

For the most up-to-date specs and warranty information, please visit www.tcp.com

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516