



LED Multi-Packs

A19 4 packs and BR30 2 packs

Economical multi-packs provide high quality light for an exceptional value.

Limitless options for the following applications:

- General Lighting
- Sconces
- Recessed Downlights
- Table Lamps
- Ceiling Fixtures
- Display Lights
- Floor Lamps
- Track Lights

Great features and benefits:

- Energy efficient: up to 85% more efficient than incandescent alternatives
- Long life: 10,000 and 15,000 hour options
- Similar look and feel as incandescent alternative
- Excellent color consistency
- Available in 2700K, 3000K, 4100K and 5000K
- Fits any installation where a standard A-lamp is used



L16A19N10



L9A19D15



L9A19N10



L8BR30D15

LED
we know light.™



Applications:

Ideal for applications where uniform multi-directional light output is required.


- ✦ Table Lamps ✦ Sconces ✦ Decorative Fixtures
- ✦ Floor Lamps ✦ Ceiling Fixtures ✦ Recessed Downlights
- ✦ Track Lights ✦ Display Lights
- ✦ Any general service lighting application

Features

Benefits

Up to 85% less energy than halogen alternatives	Instant energy savings
Long life	Minimizes replacement and maintenance costs
Very low heat generation	Perfect for sensitive display lighting such as art galleries
Excellent color consistency and CRI	Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp
UL approved for damp location	Can be used outdoors when protected from elements — withstands humidity indoors/outdoors
Shatter resistant	Lower the risk of injury and breakage
ANSI construction compliant	

Dims to ≤ 5% of full light level when applicable

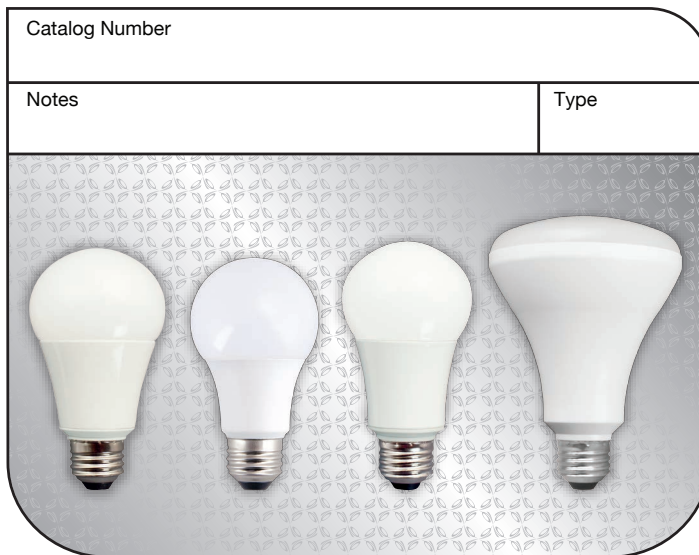

Catalog Number

Notes

Type

Specifications

Input Line Voltage:	120 VAC
Input Line Frequency:	50/60HZ
Lamp Life (Rated):	10,000 and 15,000 hour options
Minimum Starting Temp:	-30°C
Maximum Operating Temp:	40°C
CRI:	80
Vapor tight or jelly jar applications may reduce life	

Warranty	Item #	Description	Case Pack	Rated Life (hrs)	Wattage	Incandescent Wattage Comparison	Lumens	LPW	CCT	CRI	M.O.L. (inches)	Diameter (inches)	Enclosed/Recessed Luminaire	
1 YEAR WARRANTY	A-Lamps													
	L9A19N1027K4	9W Non-Dim A-Lamp 2700K 4PK	12	10,000	9	60	800	88.9	2700K	80	4.0	2.4	Y	
	L9A19N1030K4	9W Non-Dim A-Lamp 3000K 4PK	12	10,000	9	60	825	91.6	3000K	80	4.0	2.4	Y	
	L9A19N1041K4	9W Non-Dim A-Lamp 4100K 4PK	12	10,000	9	60	850	94.4	4100K	80	4.0	2.4	Y	
	L16A19N1027K4	16W Non-Dim A-Lamp 2700K 4PK	12	10,000	16	100	1500	93.8	2700K	80	4.6	2.5	Y	
	L16A19N1041K4	16W Non-Dim A-Lamp 4100K 4PK	12	10,000	16	100	1550	96.9	4100K	80	4.6	2.5	Y	
3 YEAR WARRANTY	L9A19D1527K24	9W Dim A-Lamp 2700K 24PK* *ENERGY STAR CERTIFIED	1	15,000	9	60	800	88.9	2700K	80	4.3	2.4	Y	
3 YEAR WARRANTY	BR30s													
	L8BR30D1527K2	Dim 8W BR30 - 2700K 2PK	6	15,000	8	65	650	81.3	2700K	80	5.2	3.8	Y	
	L8BR30D1530K2	Dim 8W BR30 - 3000K 2PK	6	15,000	8	65	650	81.3	3000K	80	5.2	3.8	Y	
	L8BR30D1541K2	Dim 8W BR30 - 4100K 2PK	6	15,000	8	65	700	87.5	4100K	80	5.2	3.8	Y	
	L8BR30D1550K2	Dim 8W BR30 - 5000K 2PK	6	15,000	8	65	700	87.5	5000K	80	5.2	3.8	Y	
	L8BR30N1527K2	Non-Dim 8W BR30 - 2700K 2PK	6	15,000	8	65	650	81.3	2700K	80	5.2	3.8	Y	
	L8BR30N1530K2	Non-Dim 8W BR30 - 3000K 2PK	6	15,000	8	65	650	81.3	3000K	80	5.2	3.8	Y	
	L8BR30N1541K2	Non-Dim 8W BR30 - 4100K 2PK	6	15,000	8	65	700	87.5	4100K	80	5.2	3.8	Y	
	L8BR30N1550K2	Non-Dim 8W BR30 - 5000K 2PK	6	15,000	8	65	700	87.5	5000K	80	5.2	3.8	Y	

For the most up-to-date specs, please visit www.tcpi.com