



LED Die-Cast Aluminum Exit Sign

Product Specifications



Clearly mark exit doors and improve building safety with the LED Die-Cast Aluminum Exit Sign from TCP. Featuring an attractive brushed aluminum finish and vivid red lettering, this double-sided exit sign can be mounted from ceilings or walls. A powerful battery backup system keeps the exit sign illuminated for at least 90 minutes after power is lost.

Reasons to choose the LED Die-Cast Aluminum Exit Sign from TCP

- Long-lasting, ultra-bright red LED's and easily visible lettering
- Aluminum mounting canopy included for ceiling (top) or wall (end) mount
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- UL listed for damp locations
- Internal solid-state transfer switch automatically connects internal battery to LED board for minimum 90-minute emergency illumination
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

Ideal Applications

- Retail
- Industrial
- Schools
- Hospitals

Specifications

Input Frequency.....	Dual 120/277V
Battery	4.8V NiCd
Min Start Temp	32°F (0°C)
Max Oper Temp	122°F (50°C)
Listings.....	UL Damp Location, UL924, NFPA 101 Life Safety Code NEC, OSHA, Local and State codes, certified to CEC under Title 20 regulations
Warranty.....	5-year on electronics and housing, battery prorated for 5 years



Electrical

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects to internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

Construction

- Premium-grade, die-cast aluminum housing
- Quick-snap faceplate closure
- Field-selectable knockout chevron directional indicators

Optics

- Ultra-bright, energy-efficient, long-life red LEDs
- Dual-sided easily-visible lettering


Installation

- Aluminum mounting canopy included for top (ceiling) or end (wall) mount
- Universal knockout pattern on end plate for wall mount

LED Die-Cast Aluminum Exit Sign

Item #	Description	Light Color	Housing Color
26D93	LED Die-cast Aluminum Exit Sign Red Lettering	Red	Silver

Dimensions

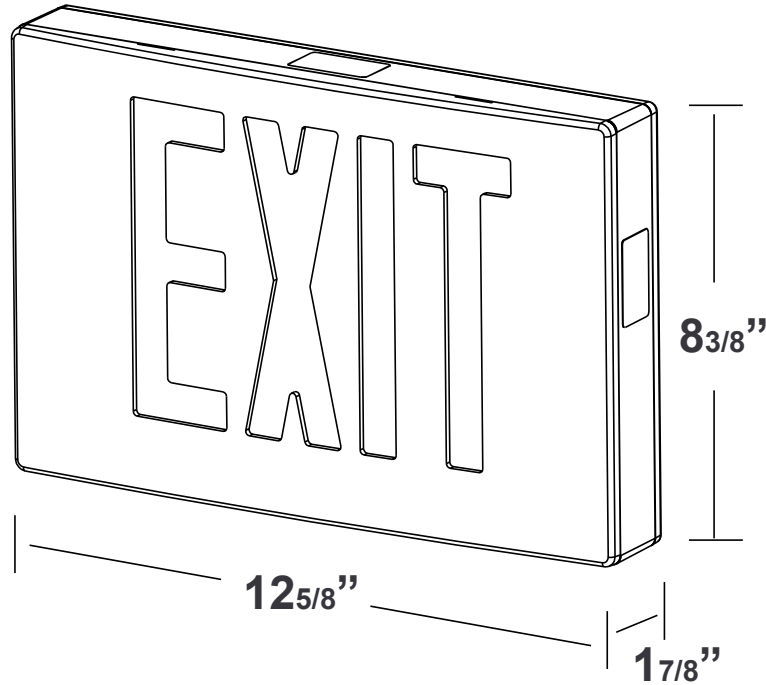

Listing

UL Listed for Damp Locations, meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes, certified to CEC under Title 20 regulations

Warranty

5-year warranty on electronics and housing; battery prorated for five years

Specifications and dimensions subject to change without notice.

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP MAR 2022/NF328356



5 YEAR
WARRANTY

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516